

Resemblance of our tiles to natural stones is absolutely delightful.

"The marble type granular or vein like structure is not limited to surface, but goes to the depth of the total cross section of tile."

it can be ground or cut or chamfered and yet the granular beauty will unveil its glory to the fullest.

 **9mm thickness**



FLEXURAL RESISTANCE
RESISTENCIA A LA FLEXION



FROST PROOF
RESISTENCIA A LA HELADA



WEAR RESISTANCE
RESISTENCIA AL DESGASTE



SCRATCH RESISTANCE
RESISTENCIA AL RAYADO



THERMIC IMPACT RESISTANCE
RESISTENCIA AL CHOQUE TERMICO



SLIP RESISTANCE
RESISTENCIA AL DESLIZAMIENTO



STAIN RESISTANCE
RESISTENCIA A LAS MANCHAS



CHEMICAL RESISTANCE
RESISTENCIA QUIMICA



ABSORPTION RESISTANCE
RESISTENCIA A LA ABSORCION



EASY TO CLEAN
FACIL LIMPIEZA



EASY TO INSTALL
FACIL COLOCACION



ECOLOGICAL
ECOLOGICO



Exterior Building Facades





an impeccable marble look & feeling

Formats

800x
1600
mm
80x160cm


1200x
1200
mm
120x120cm

600x
1200
mm
60x120cm

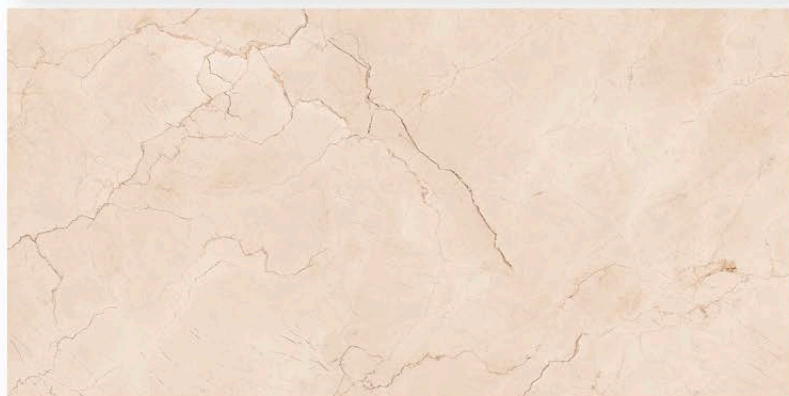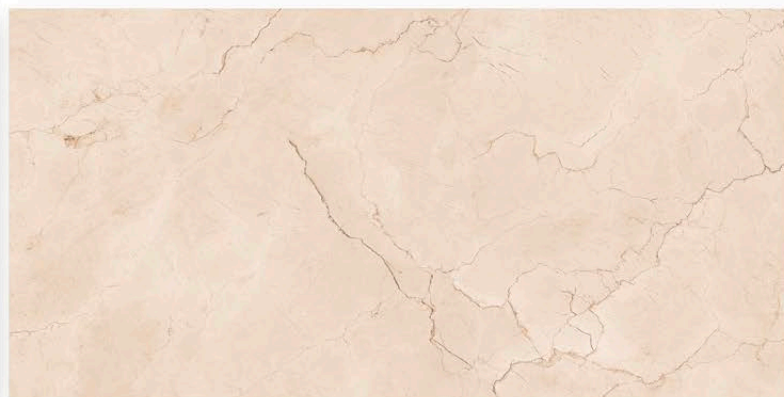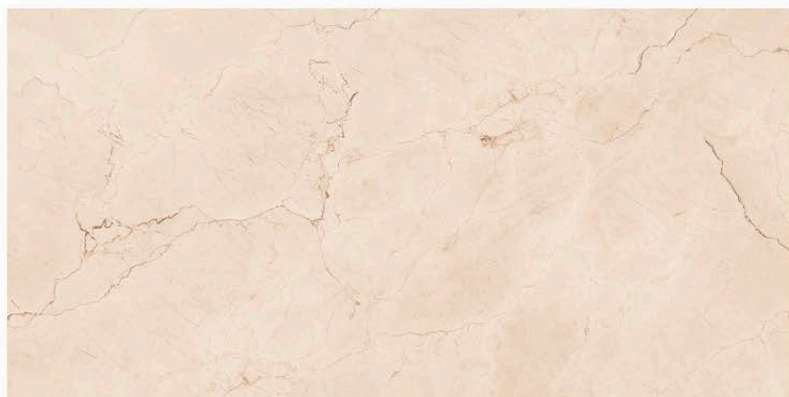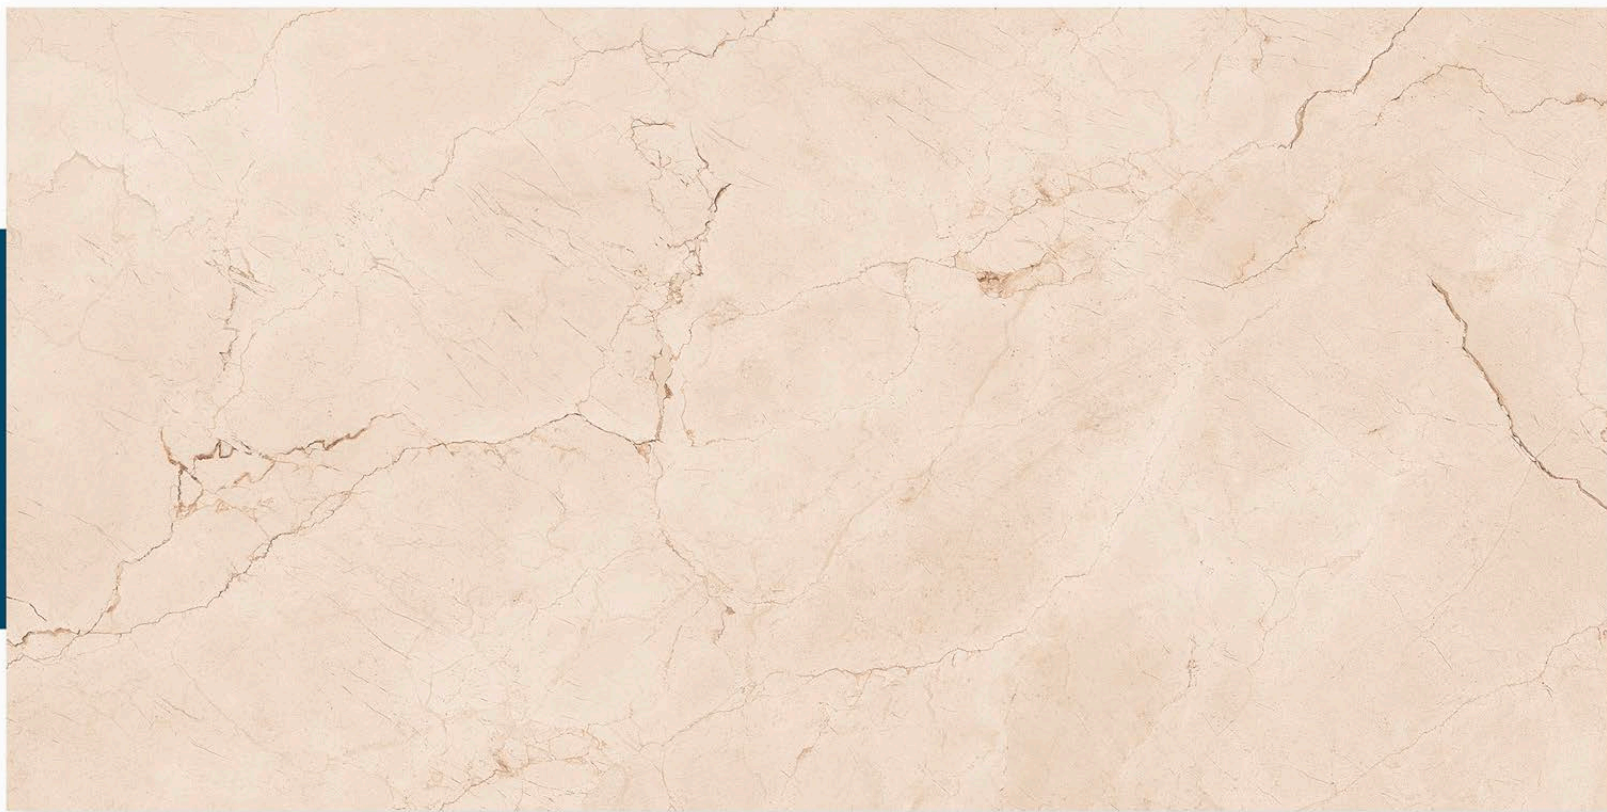


ALBERO BROWN

600 X 1200 MM , SATIN ,

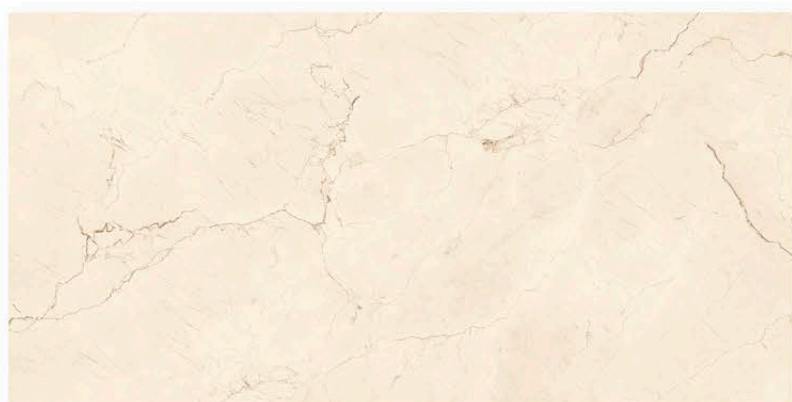


ALBERO CREMA

600 X 1200 MM, SATIN,

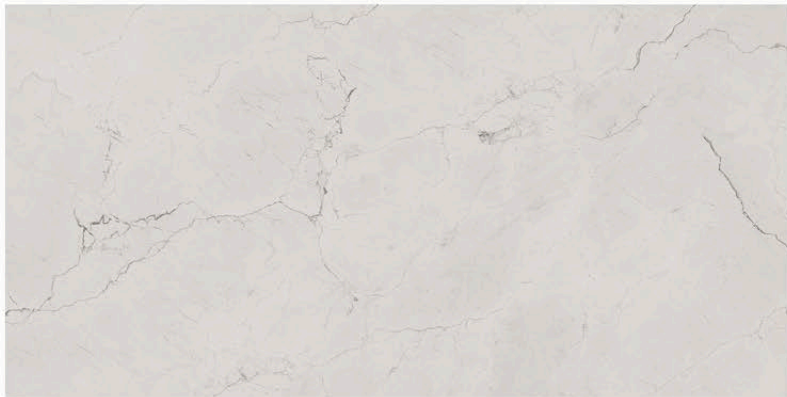


ALBERO GREY

600 X 1200 MM , SATIN ,

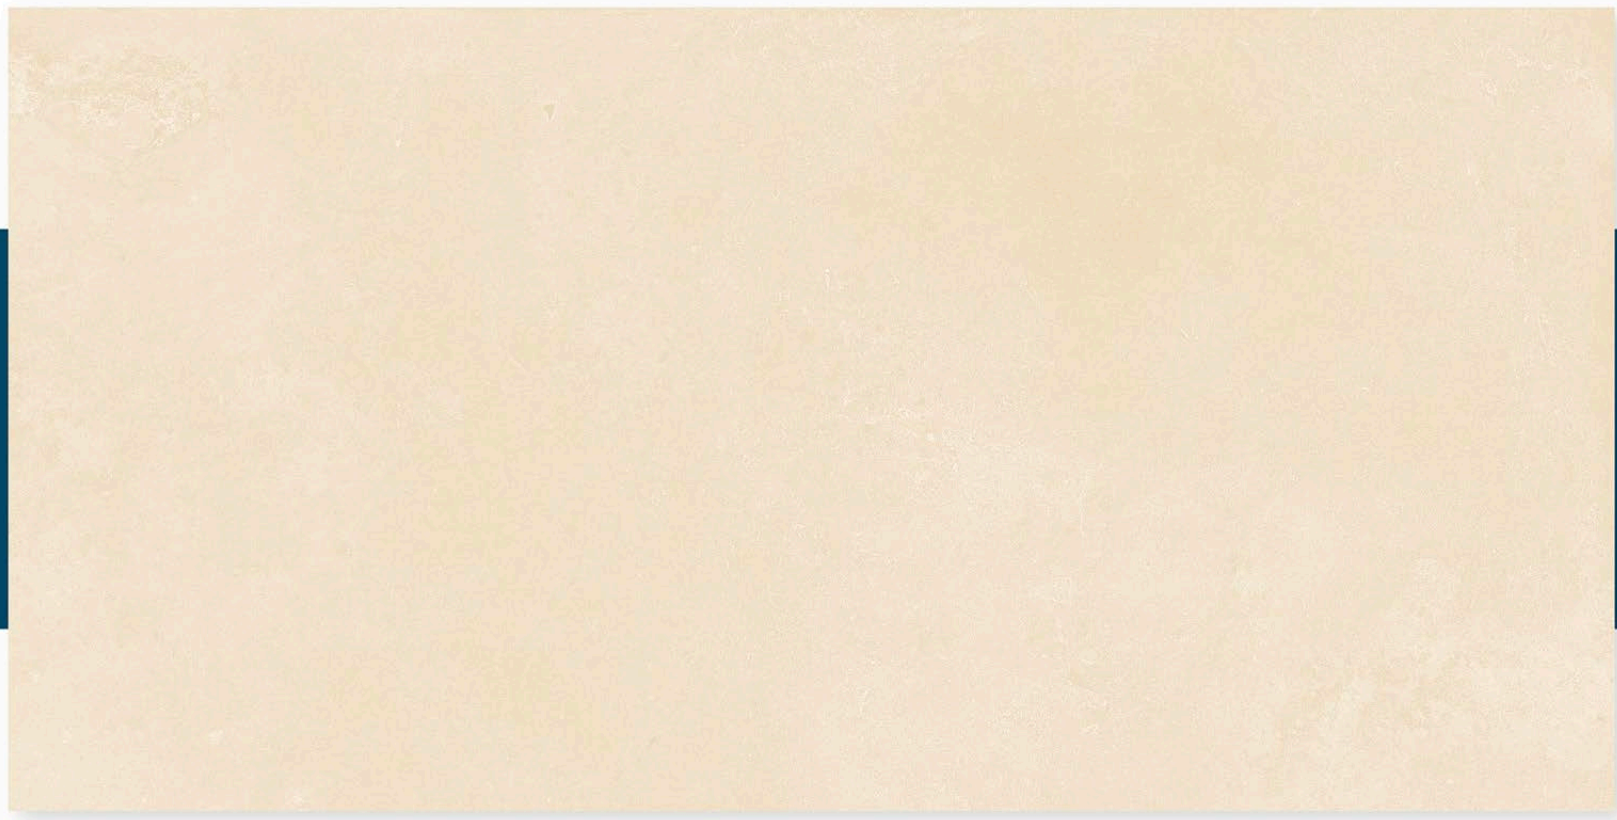

CEMENTO BEIGE

600 X 1200 MM , SATIN ,

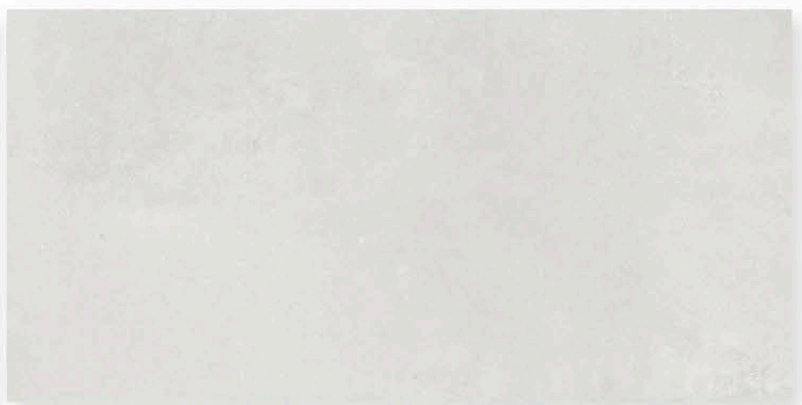

CEMENTO WHITE

600 X 1200 MM , SATIN ,







CEMENTO GREY

600 X 1200 MM , SATIN ,



CRESTA BIANCO

600 X 1200 MM, SATIN,

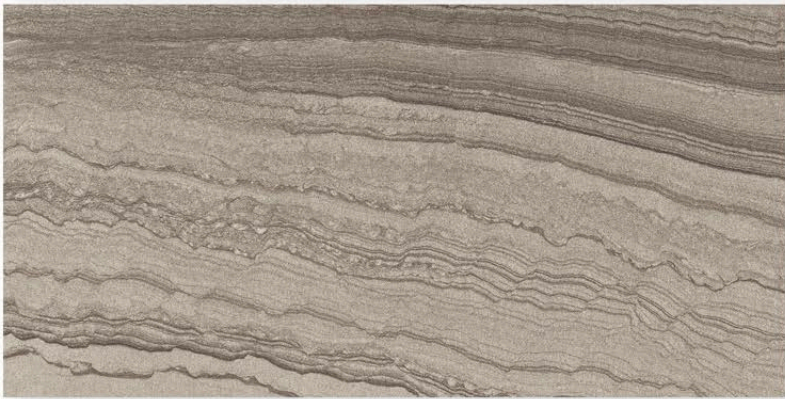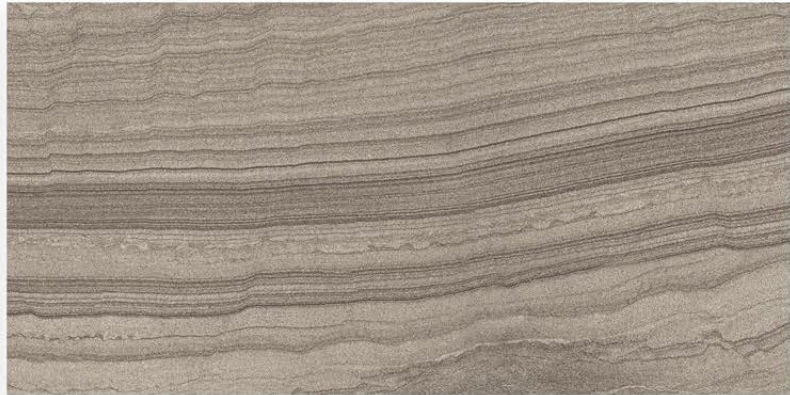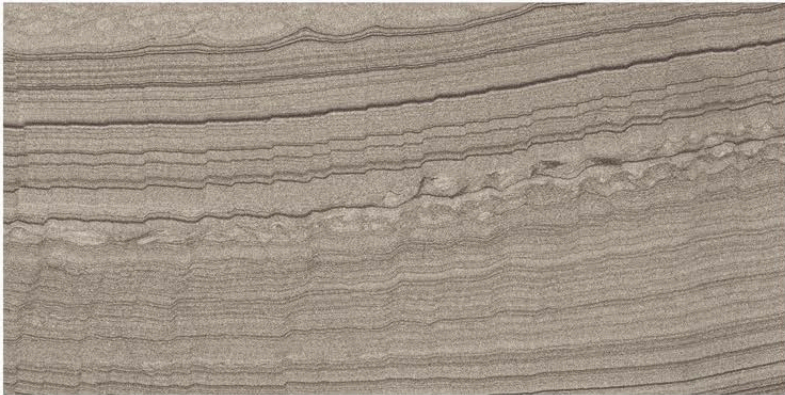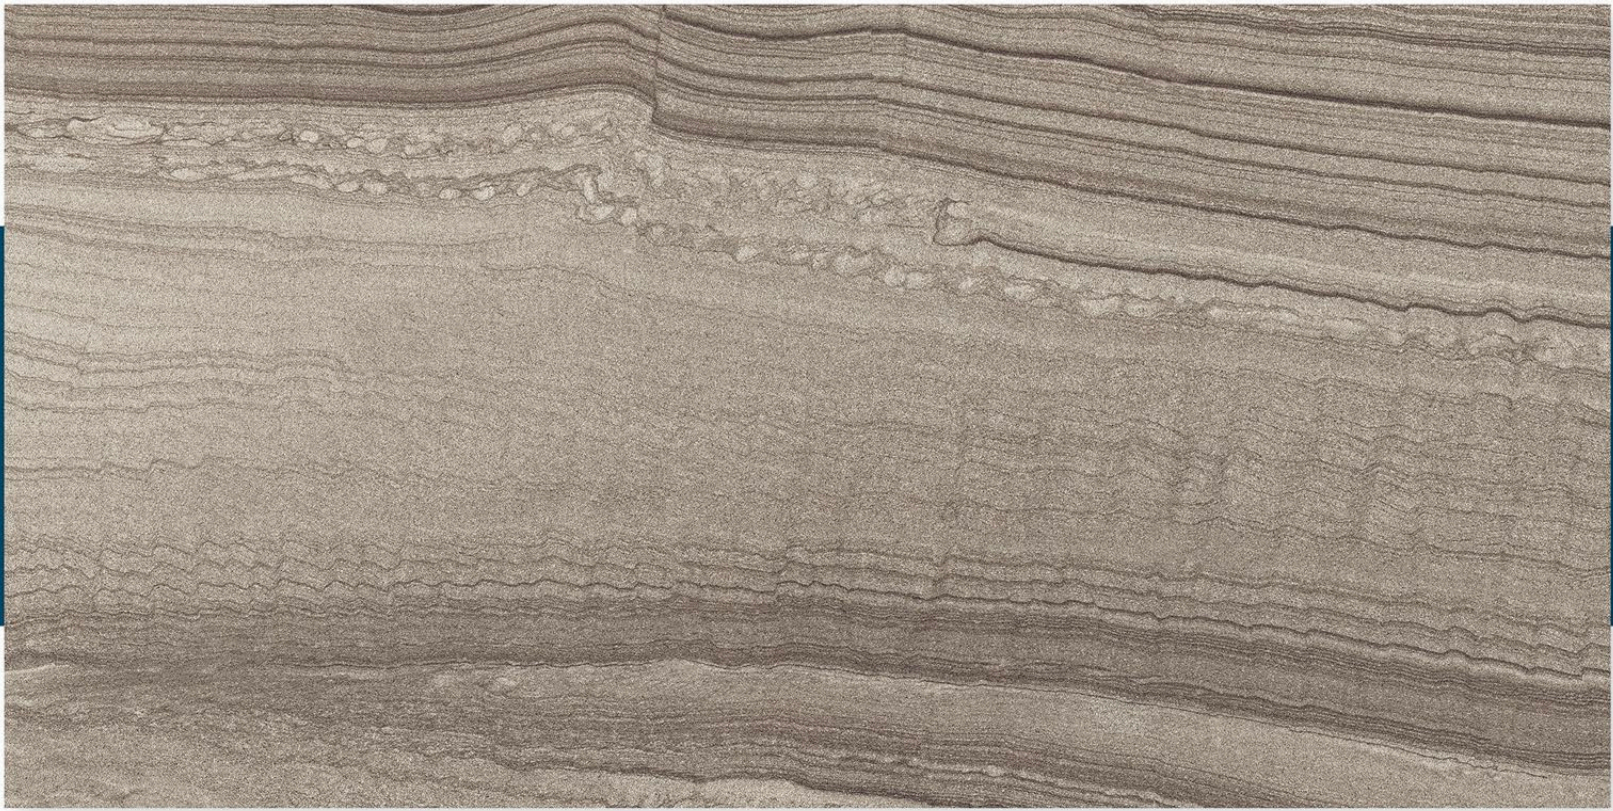





CRESTA CHOCO

600 X 1200 MM , SATIN ,



CRESTA CREMA

600 X 1200 MM , SATIN ,

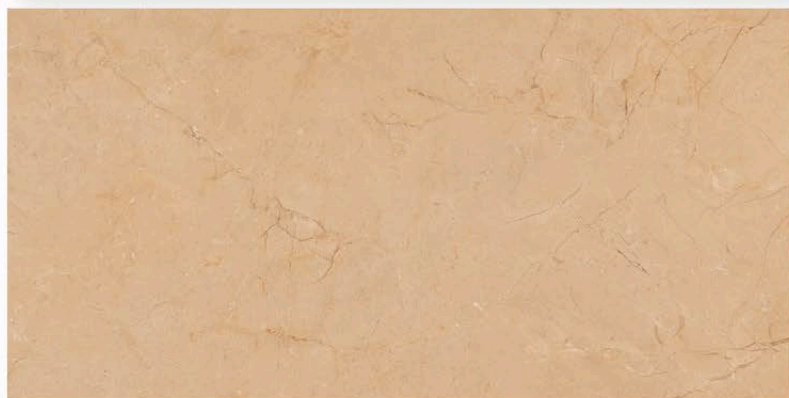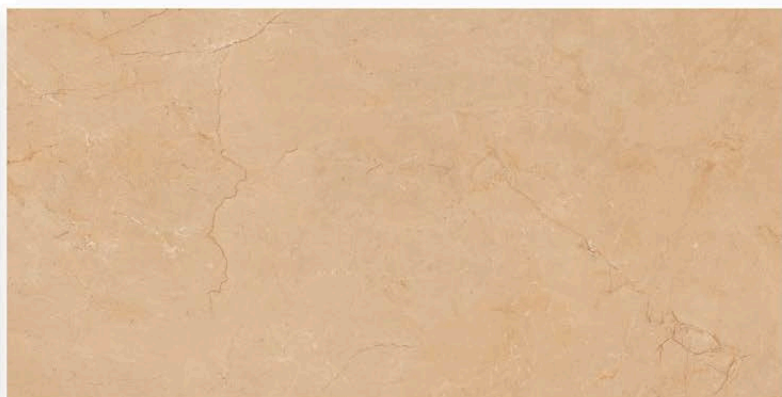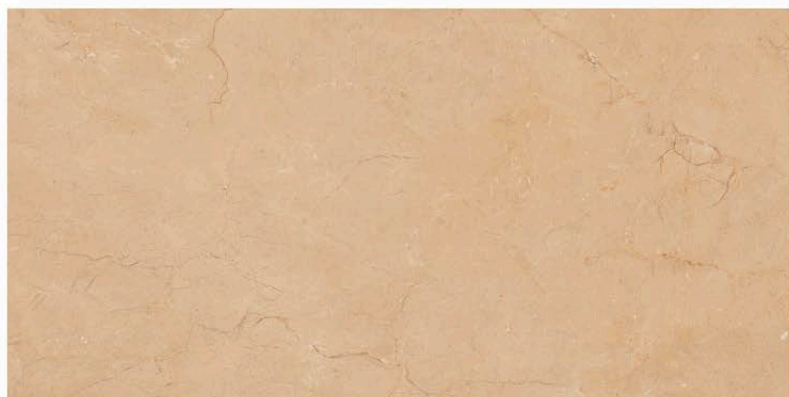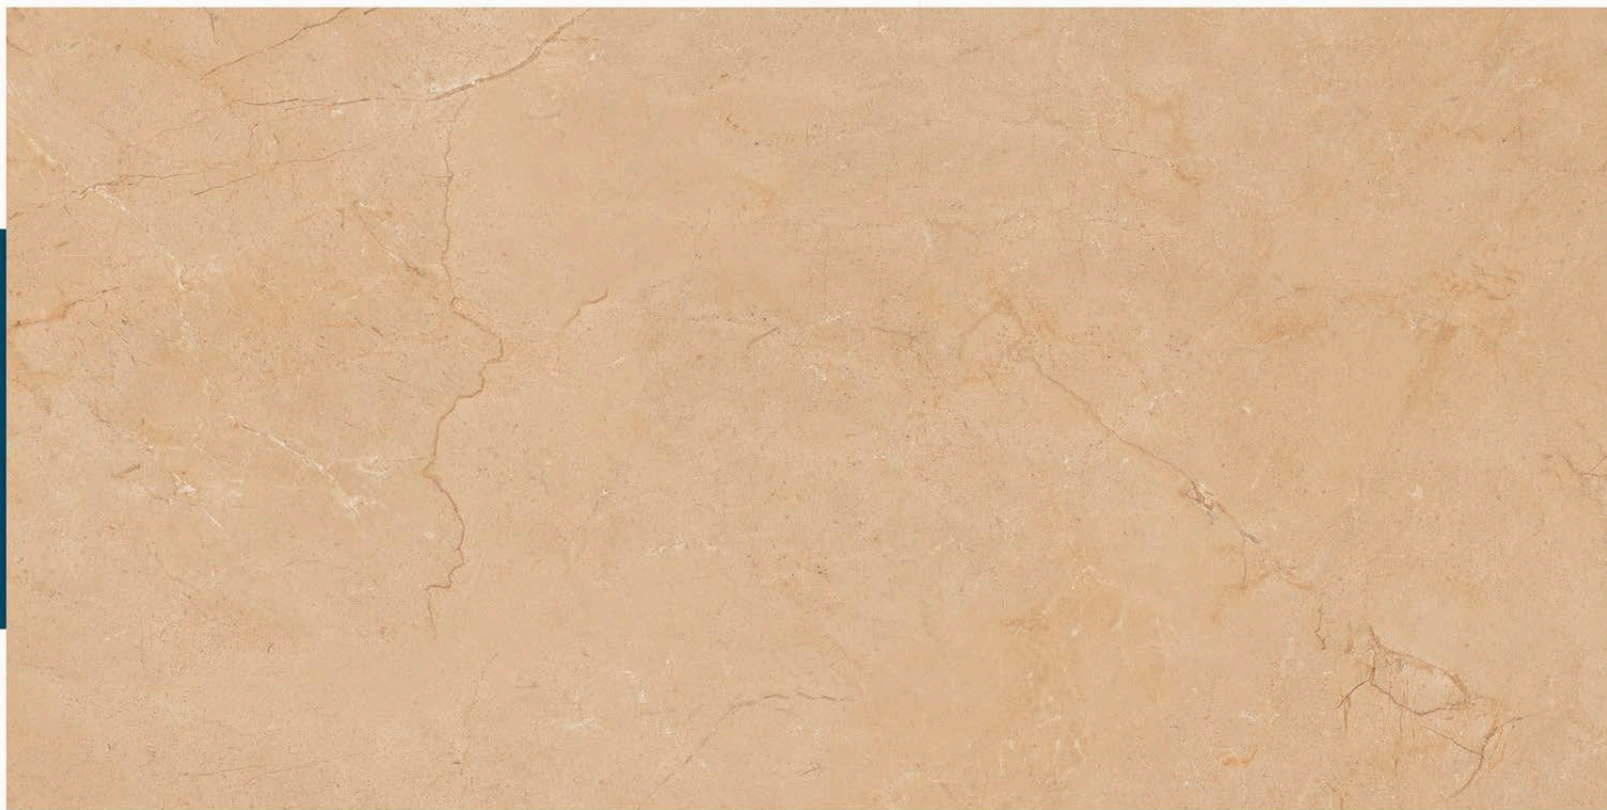



DALTILE GOLD

600 X 1200 MM , SATIN ,




DALTILE NATURAL

600 X 1200 MM , SATIN ,

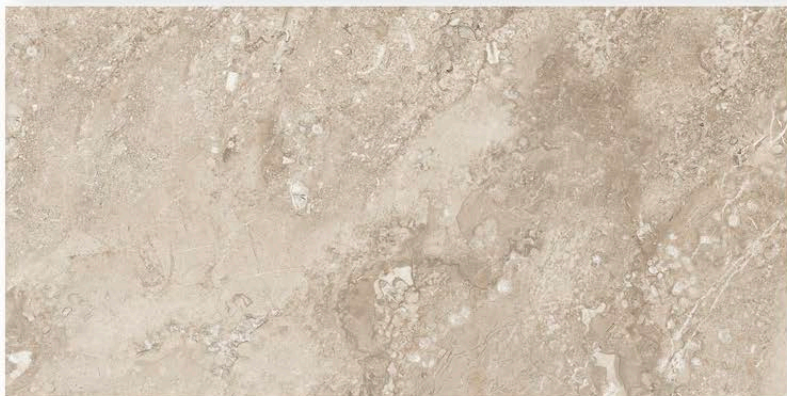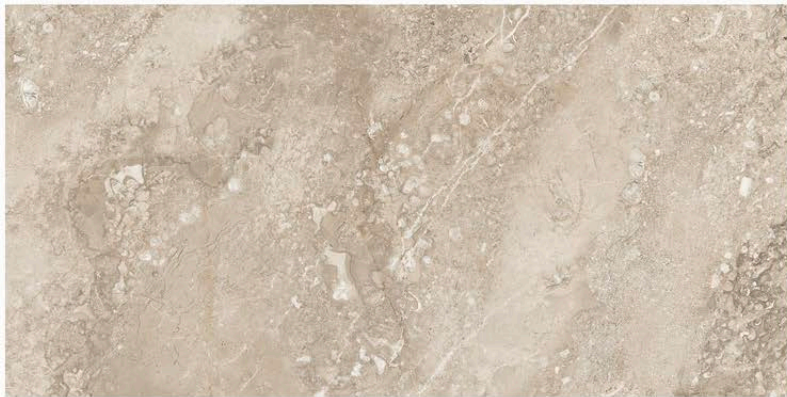



DORAIN BEIGE

600 X 1200 MM , SATIN ,

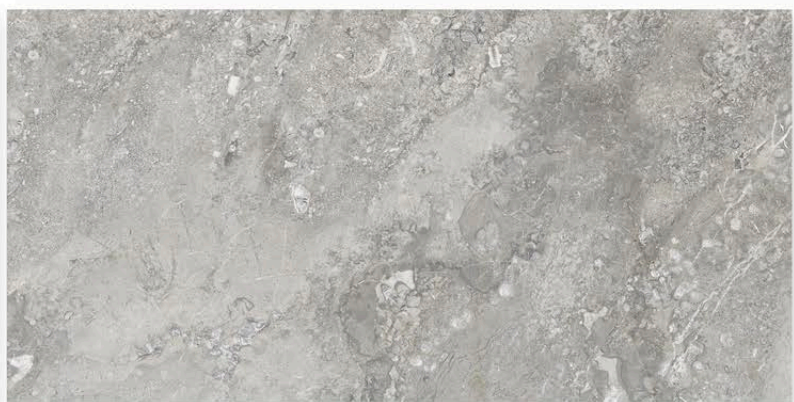


DORAIN GREY

600 X 1200 MM , SATIN ,

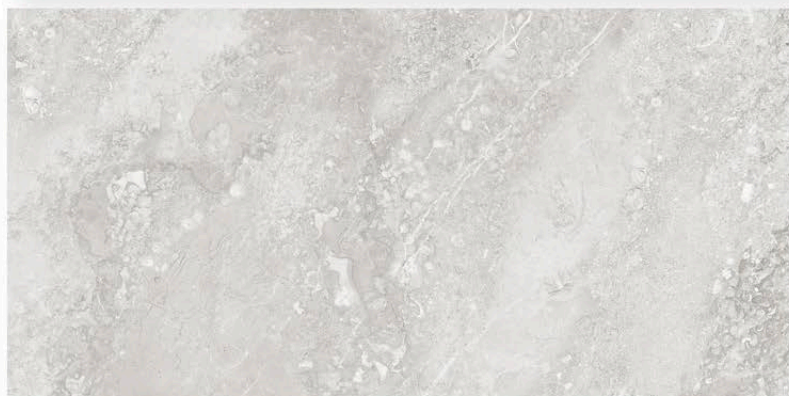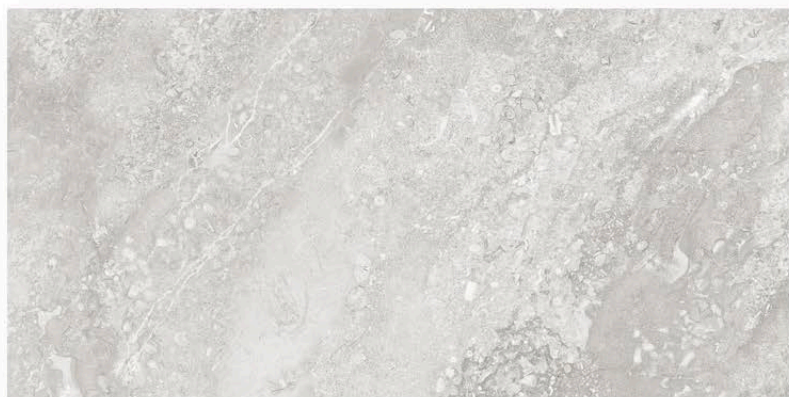




DORAIN WHITE

600 X 1200 MM , SATIN ,

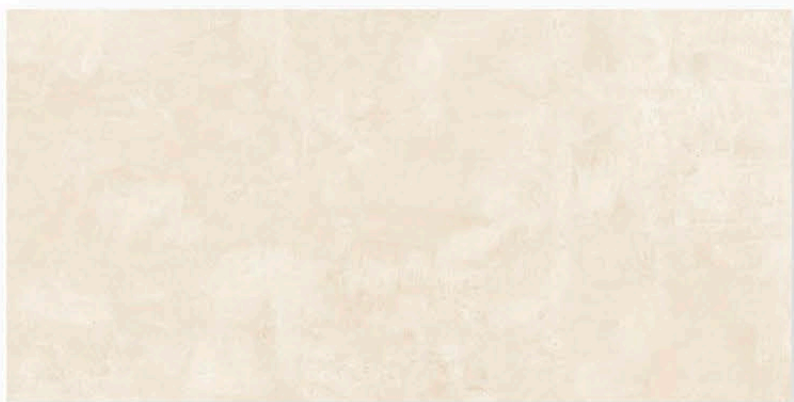


LEMONY BEIGE

600 X 1200 MM, SATIN,

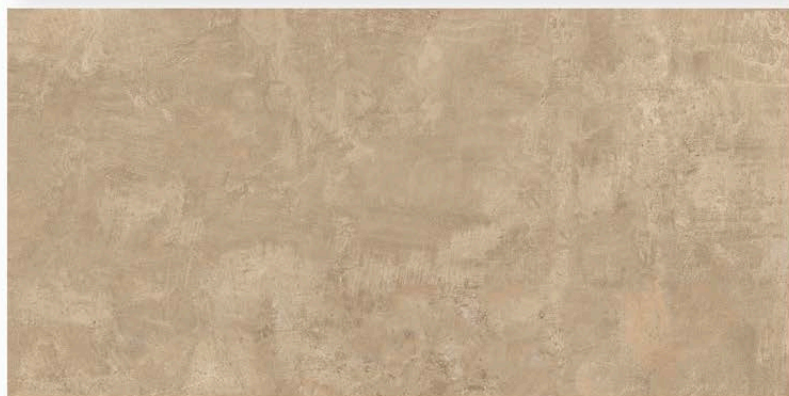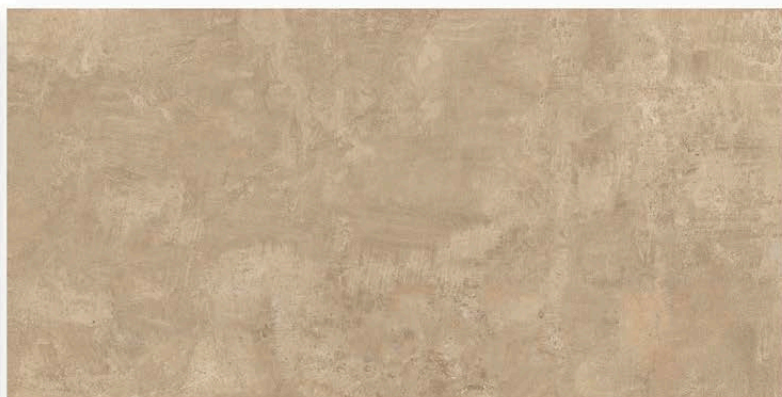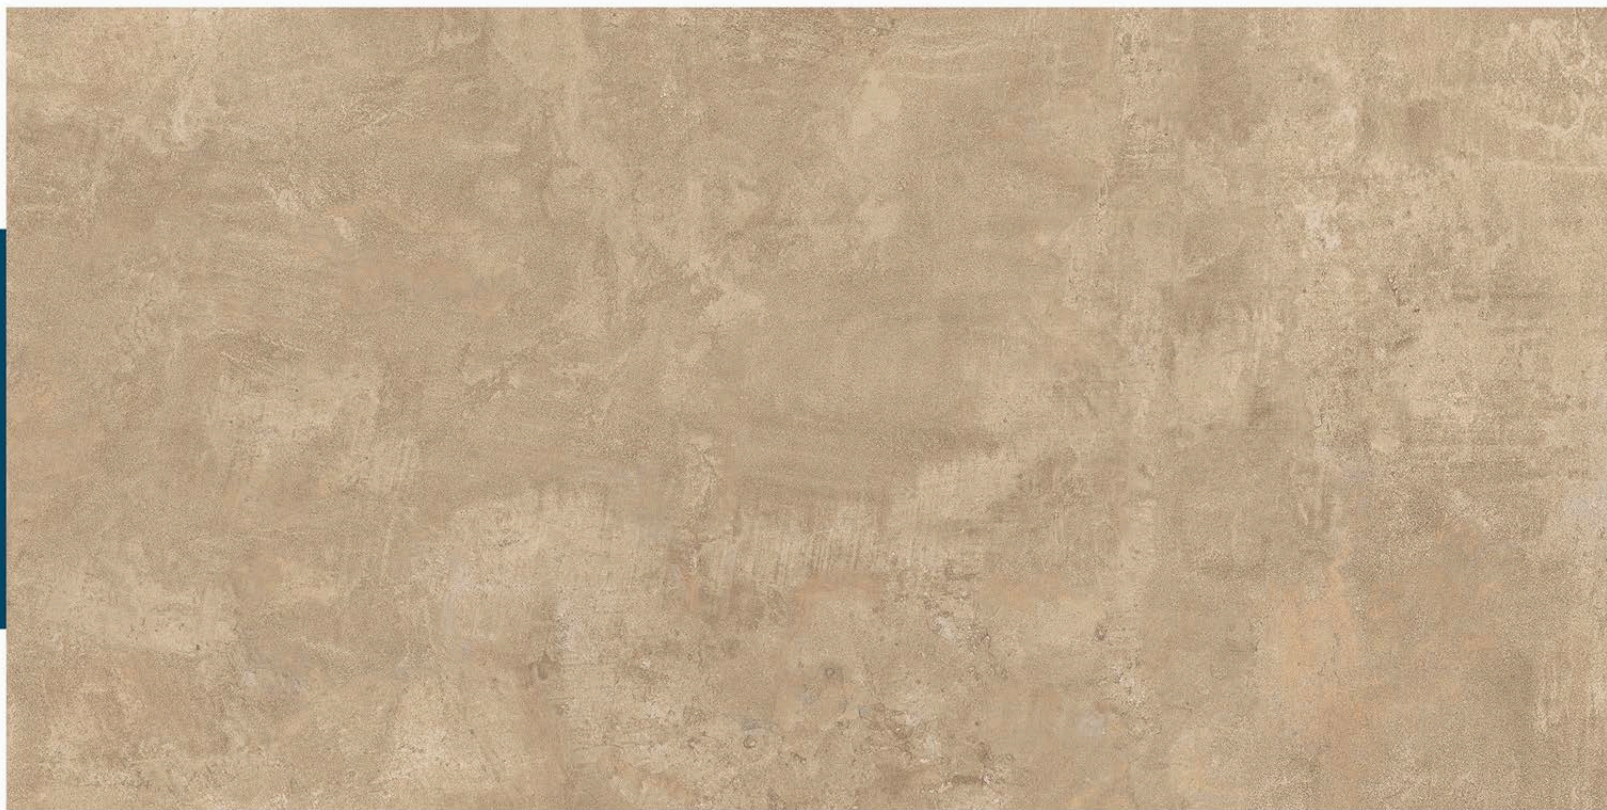





LEMONY BROWN

600 X 1200 MM , SATIN ,

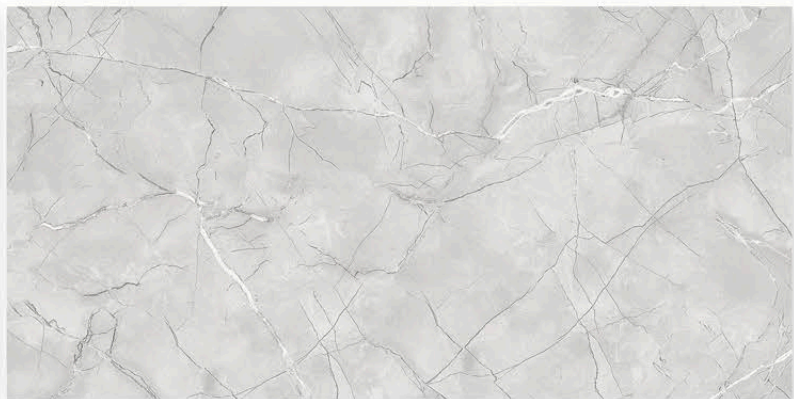




MELLOW BIANCO

600 X 1200 MM , SATIN ,

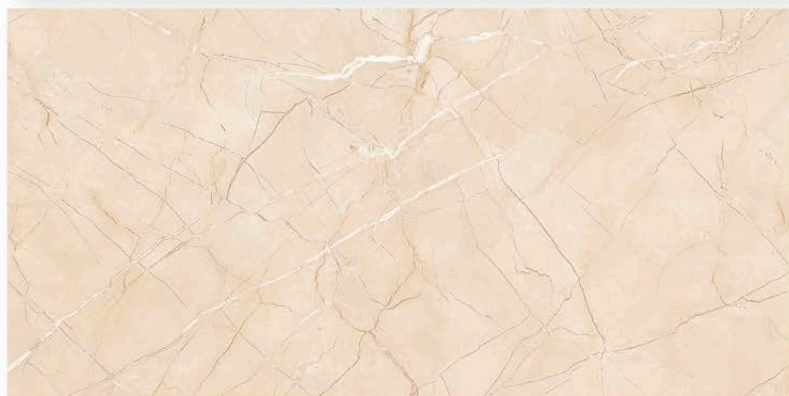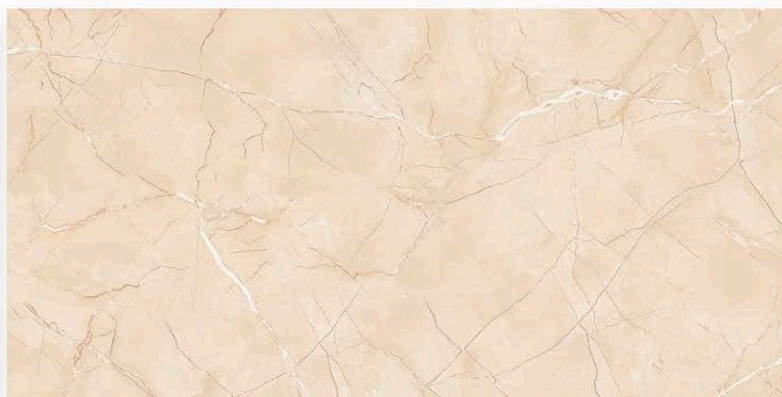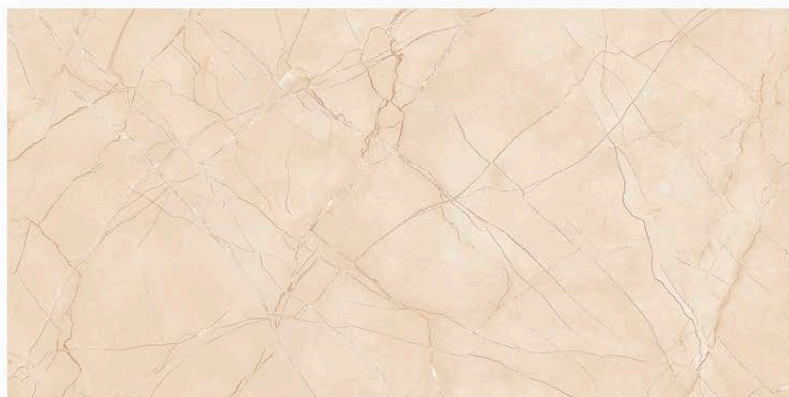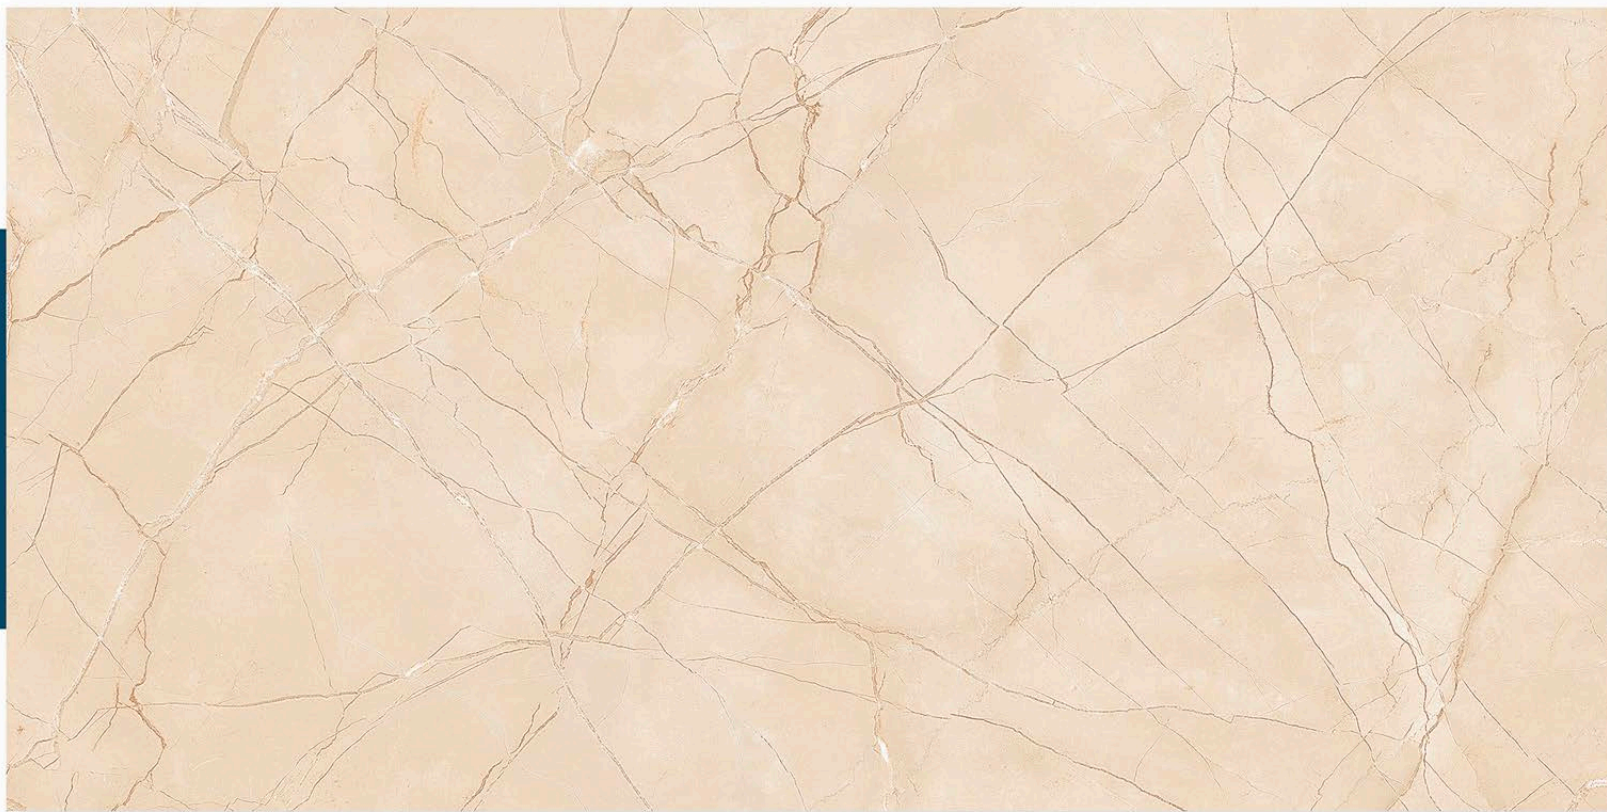



MELLOW CREMA

600 X 1200 MM , SATIN ,

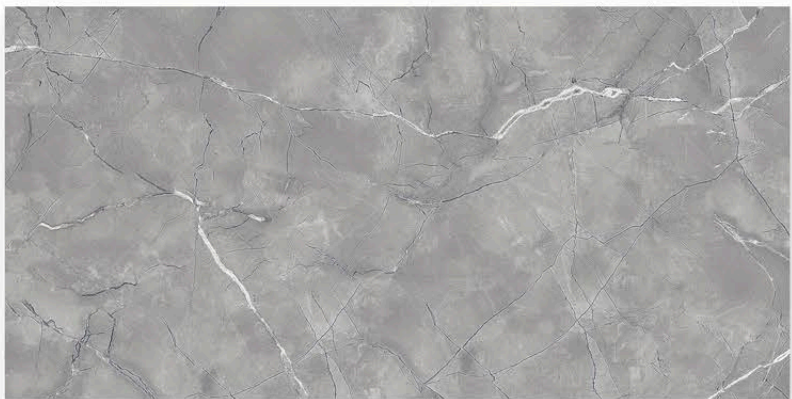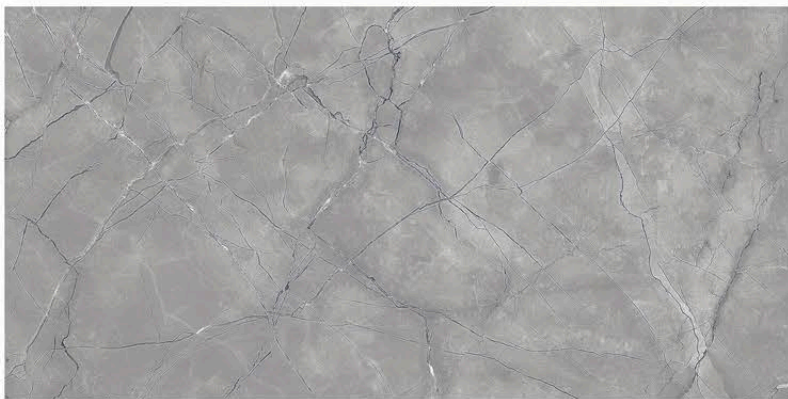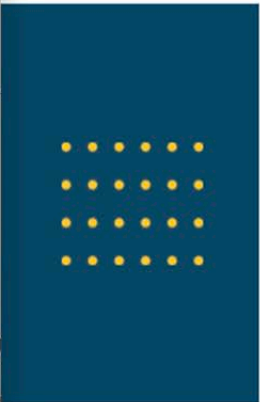



MELLOW GREY

600 X 1200 MM , SATIN ,

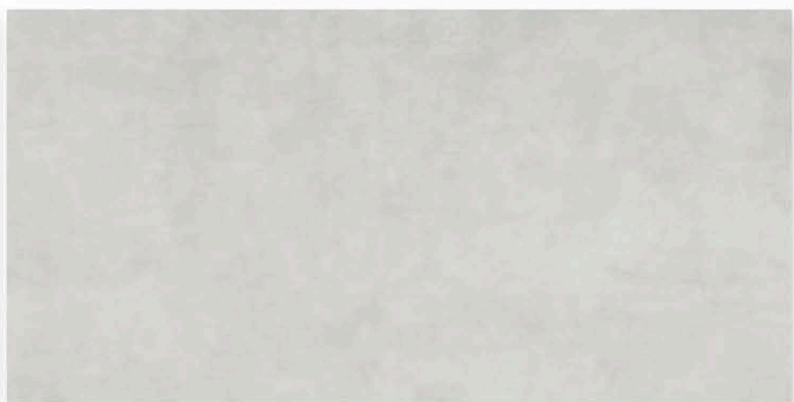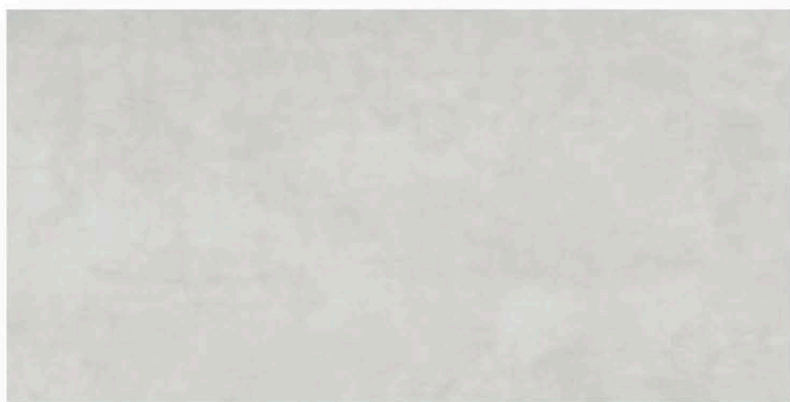


MELT ASH

600 X 1200 MM , SATIN ,

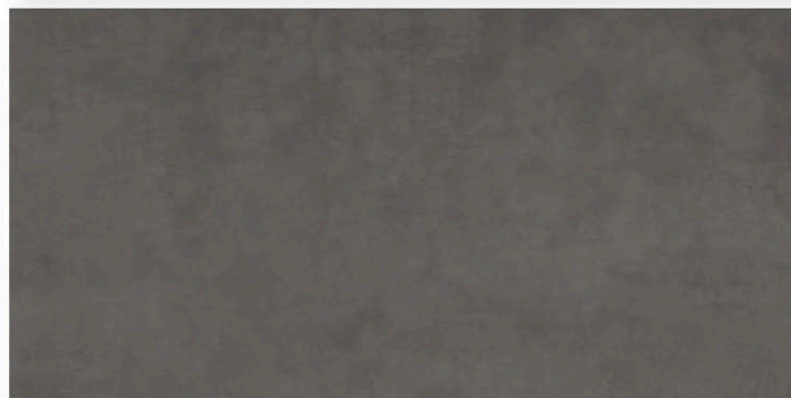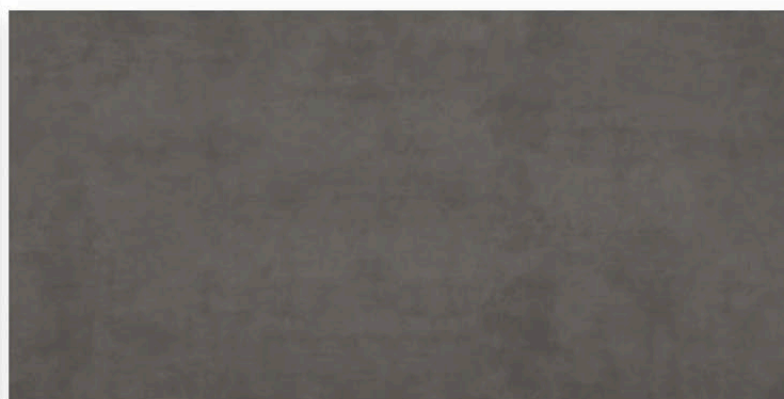




MELT COTTO

600 X 1200 MM , SATIN ,

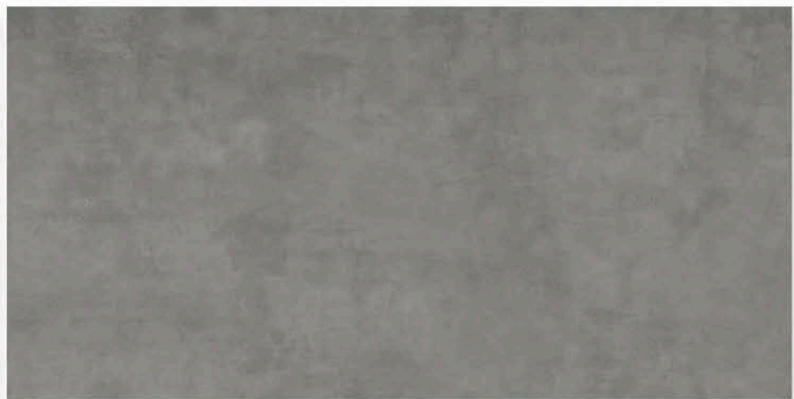

MELT GREY

600 X 1200 MM, SATIN,

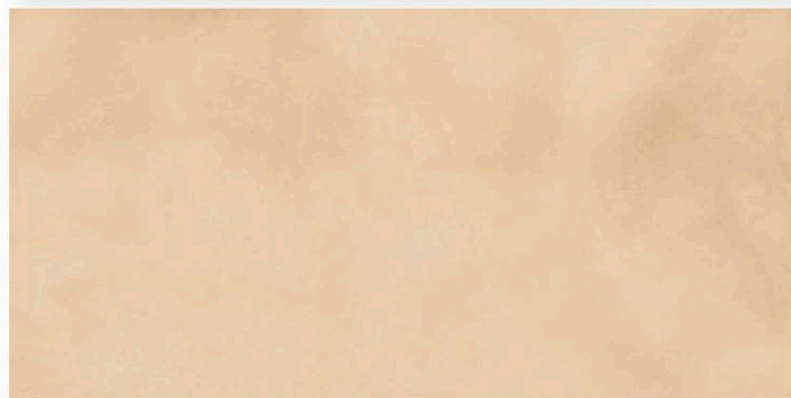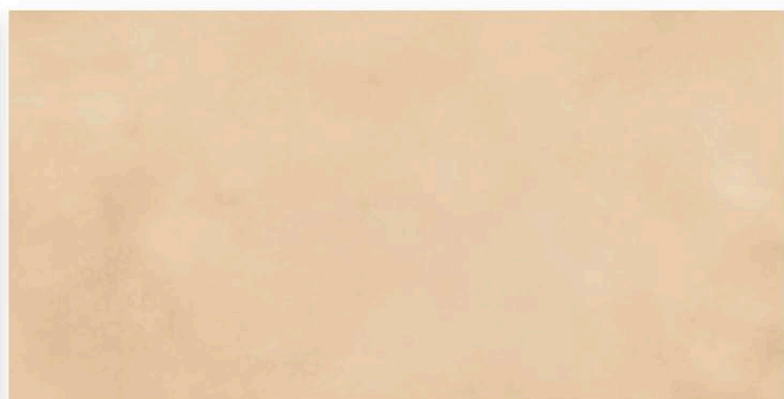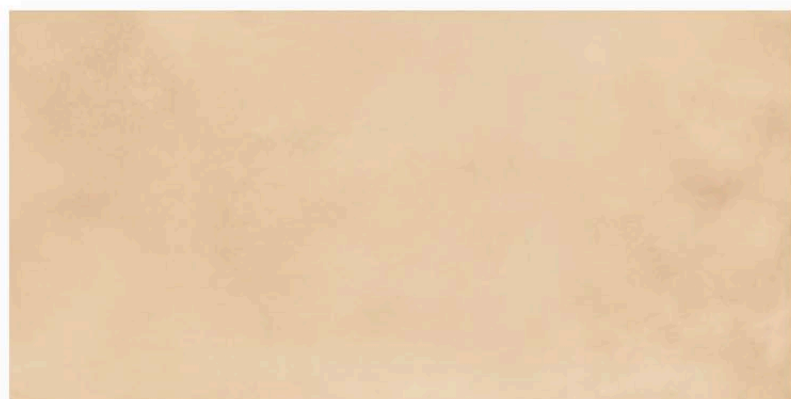

METRIX BEIGE

600 X 1200 MM , SATIN ,





METRIX COTTO

600 X 1200 MM , SATIN ,



METRIX GREY

600 X 1200 MM , SATIN ,

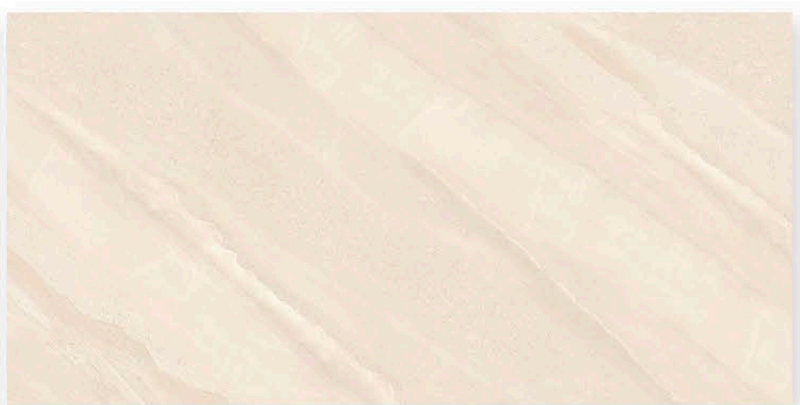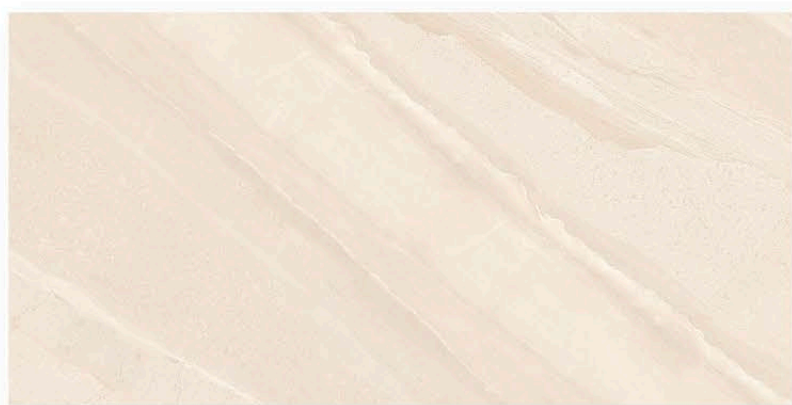




PARKAR BEIGE

600 X 1200 MM, SATIN,




POLAR BEIGE

600 X 1200 MM , SATIN ,

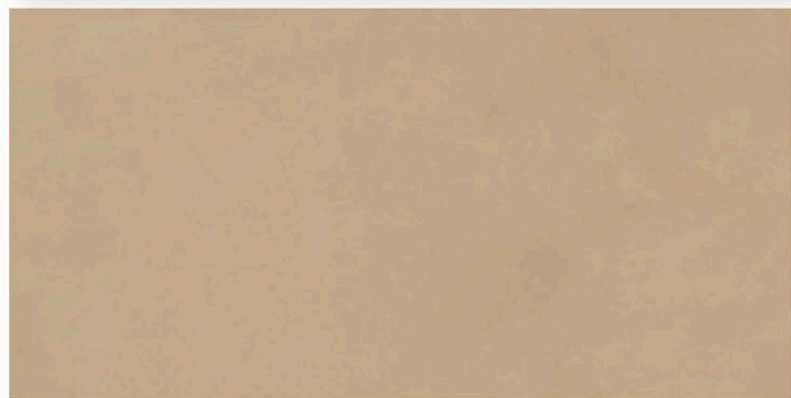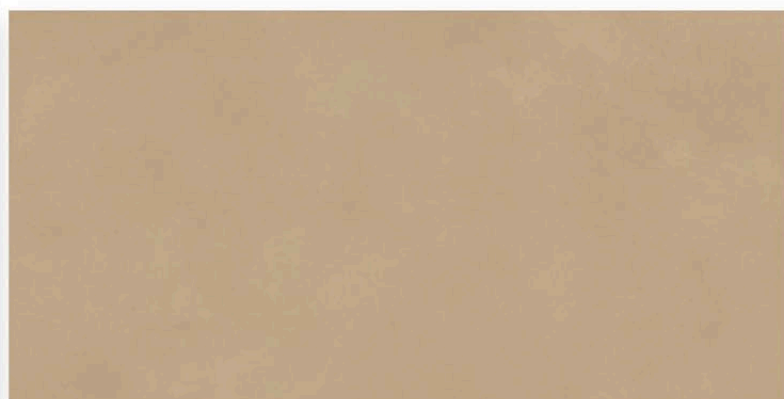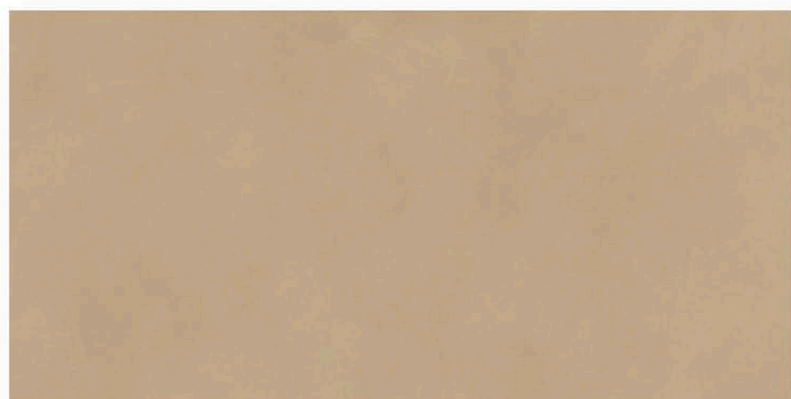




REGAL BEIGE

600 X 1200 MM , SATIN ,

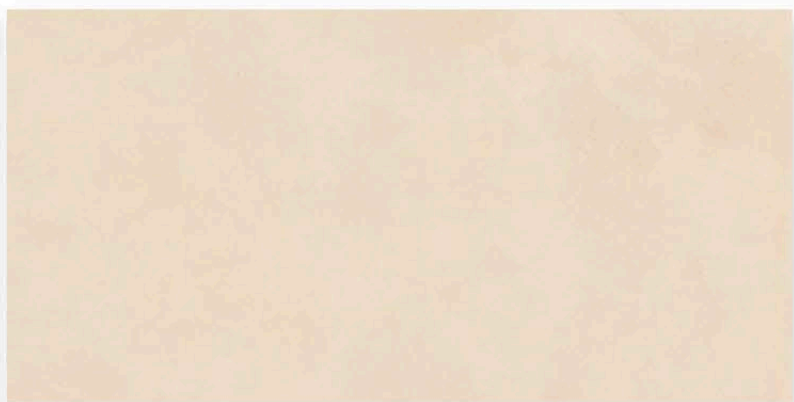



REGAL CREMA

600 X 1200 MM, SATIN,

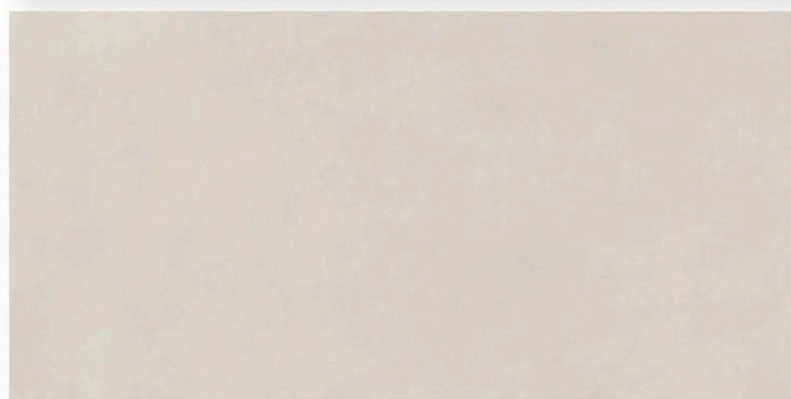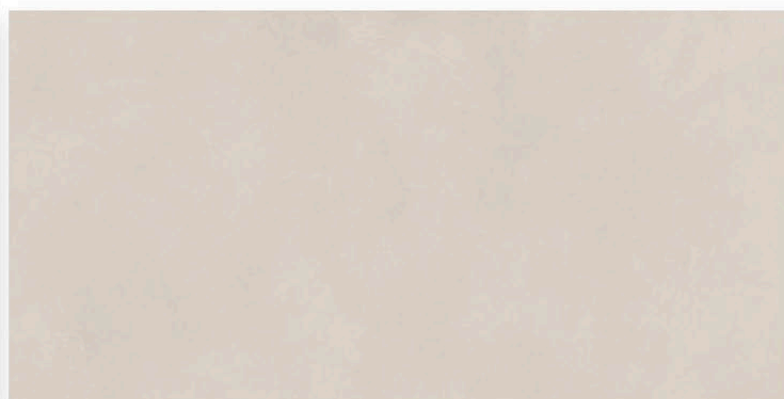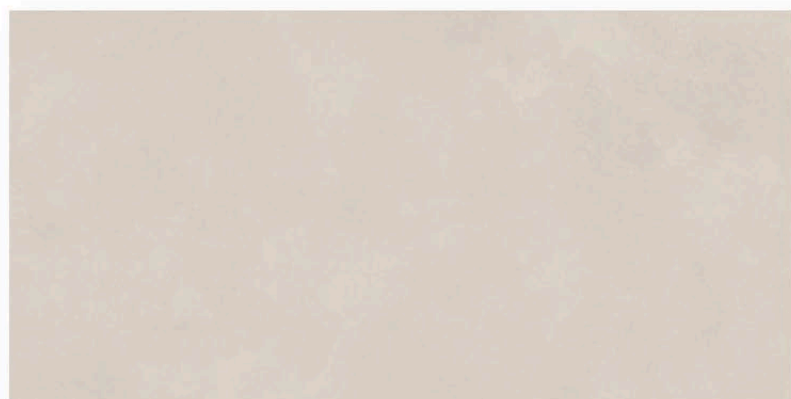



REGAL GREY

600 X 1200 MM, SATIN,

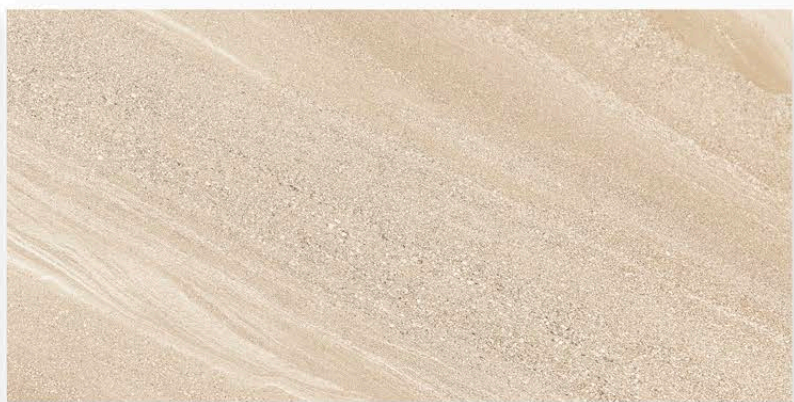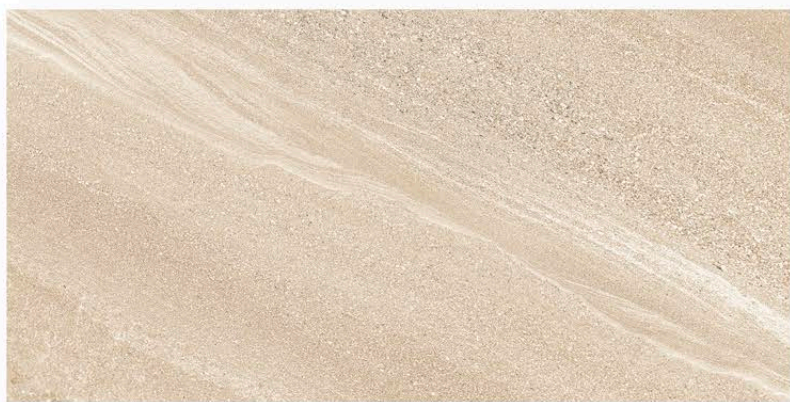


SANDSTONE BEIGE

600 X 1200 MM , SATIN ,

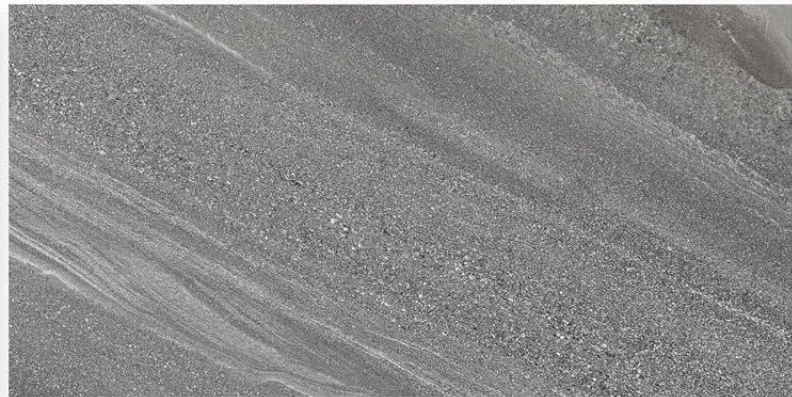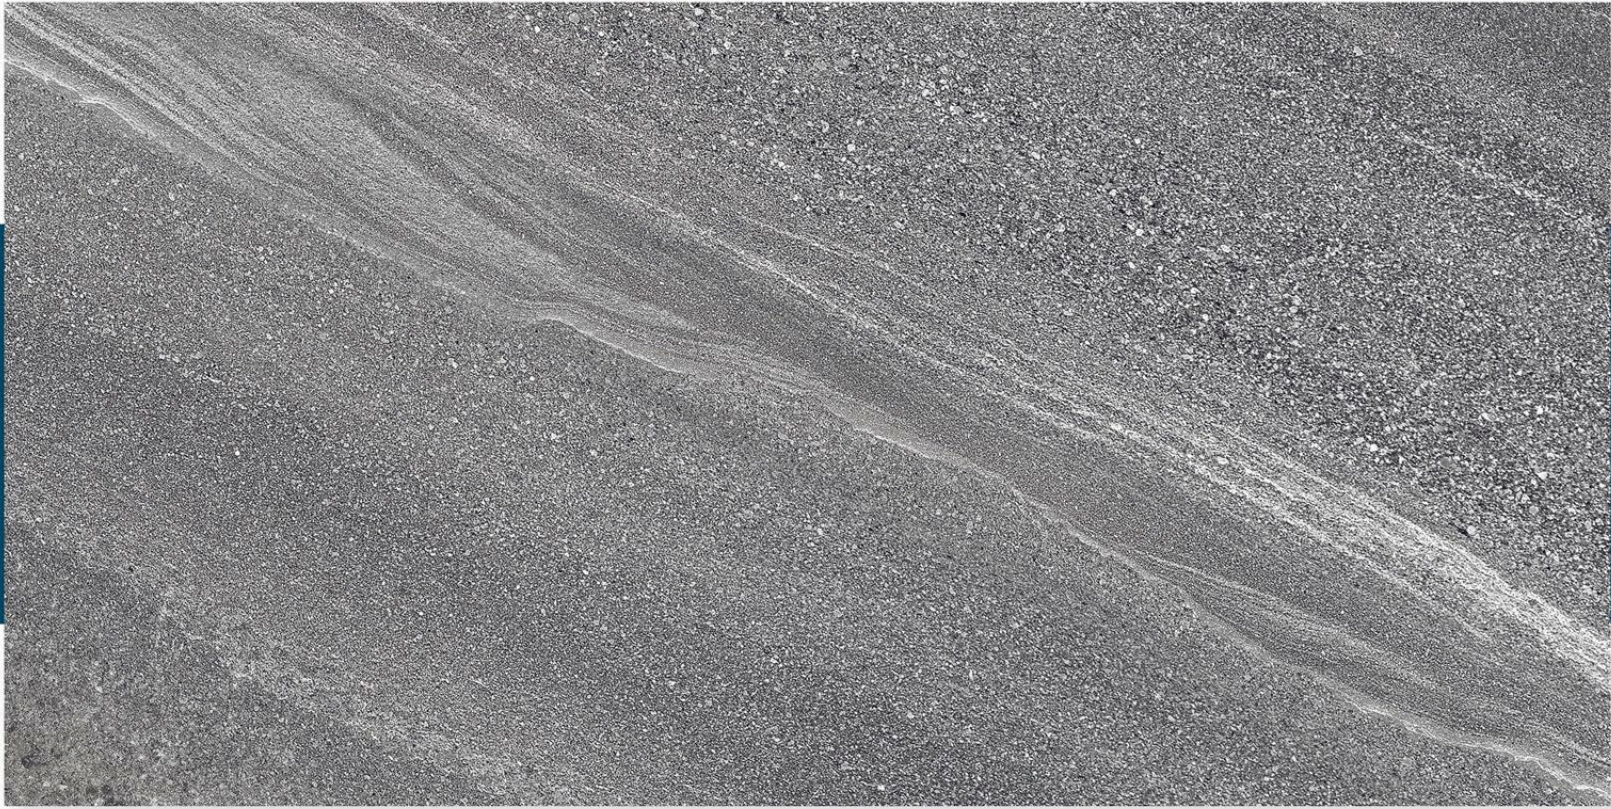





SANDSTONE BLACK

600 X 1200 MM , SATIN ,

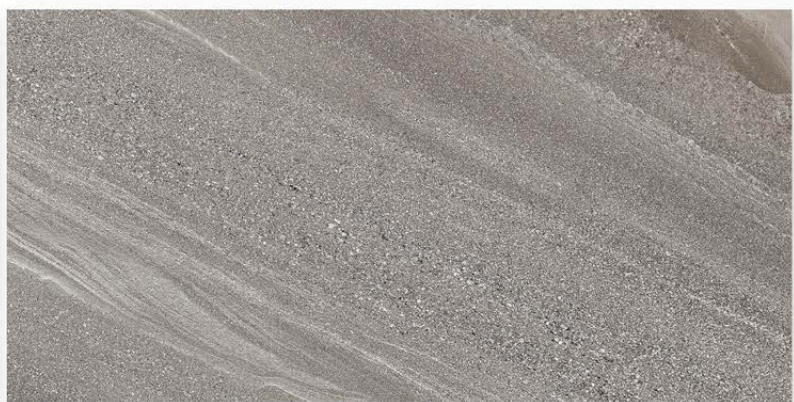



SANDSTONE CHOCO

600 X 1200 MM , SATIN ,

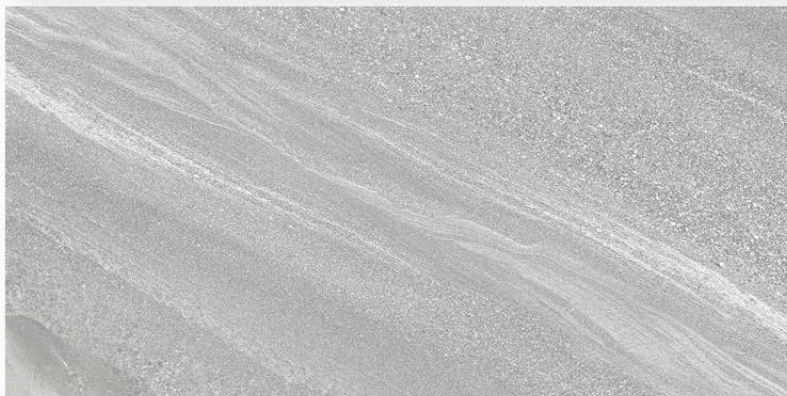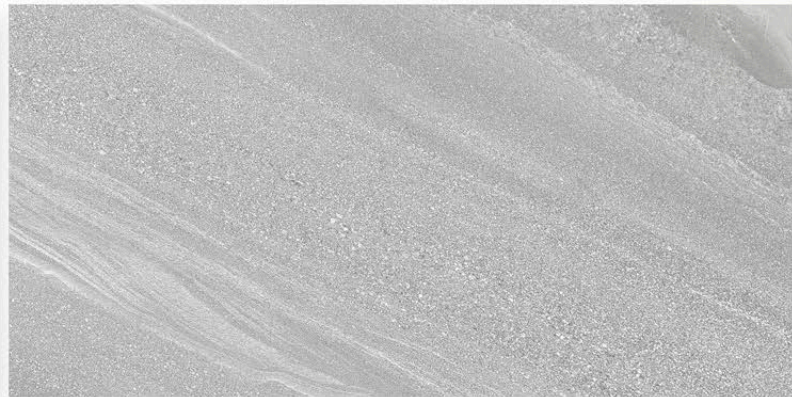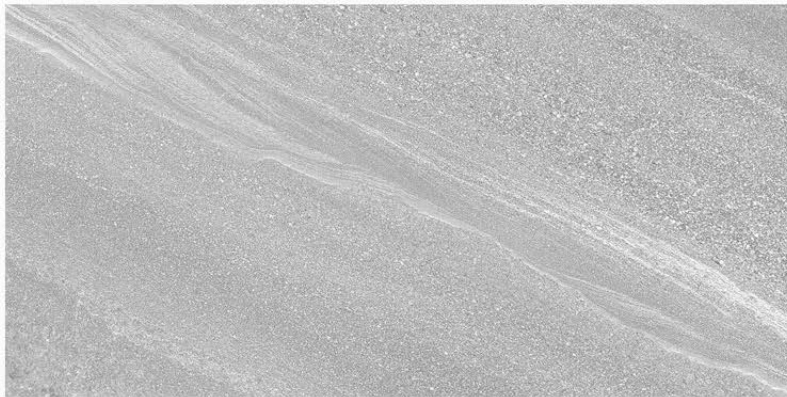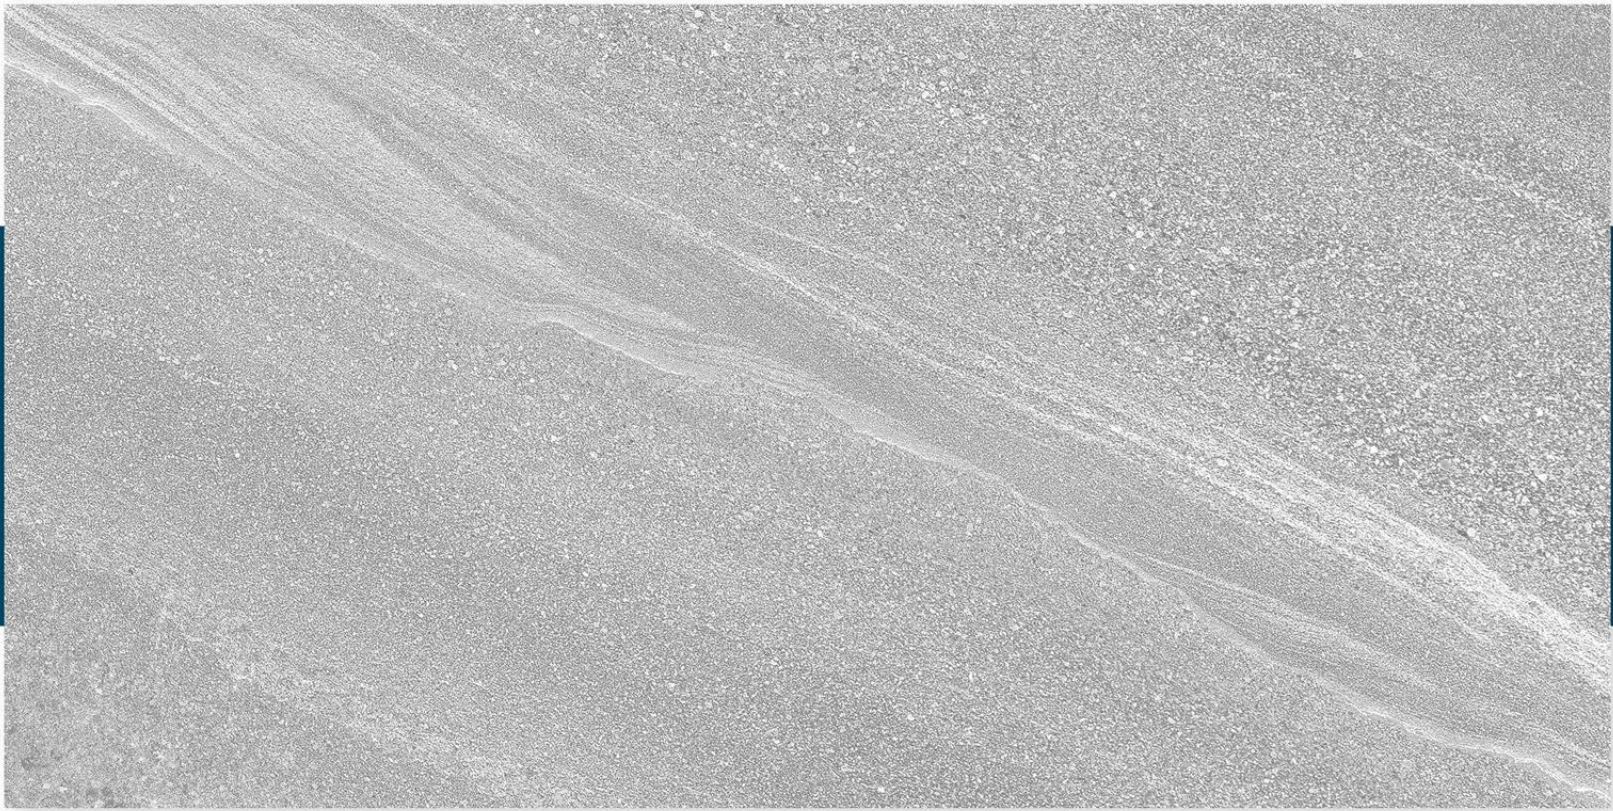





SANDSTONE GREY

600 X 1200 MM , SATIN ,

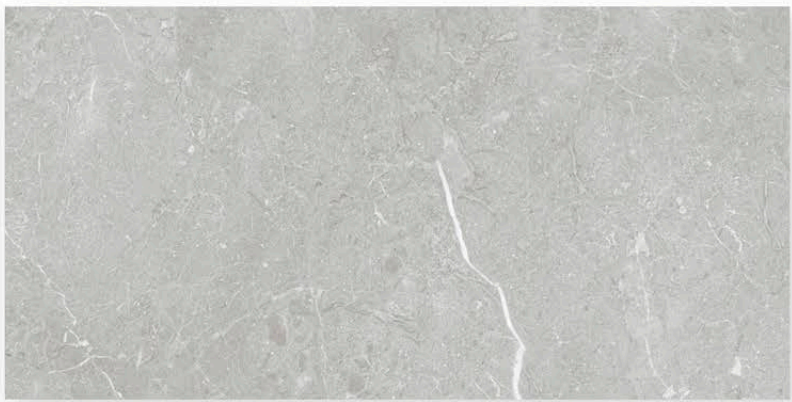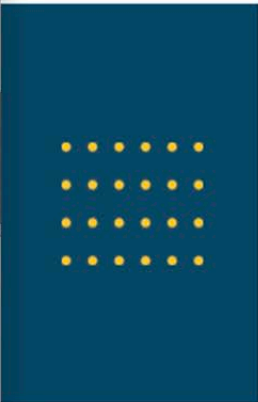

TACO BRUNO

600 X 1200 MM , SATIN ,

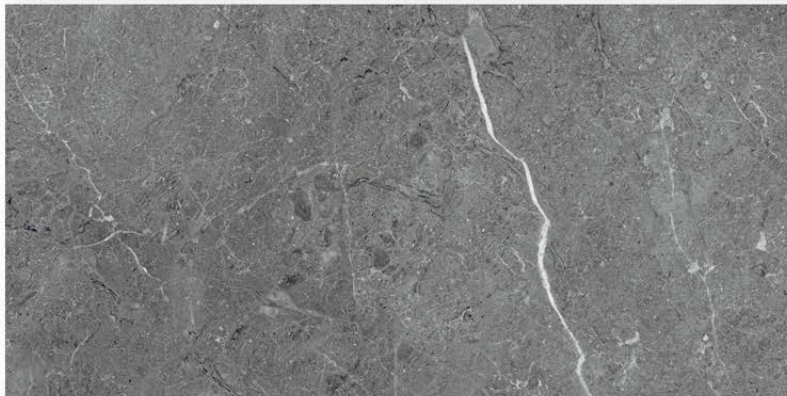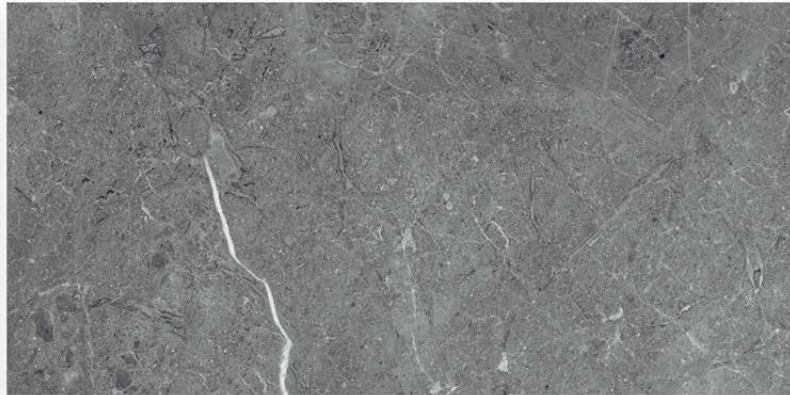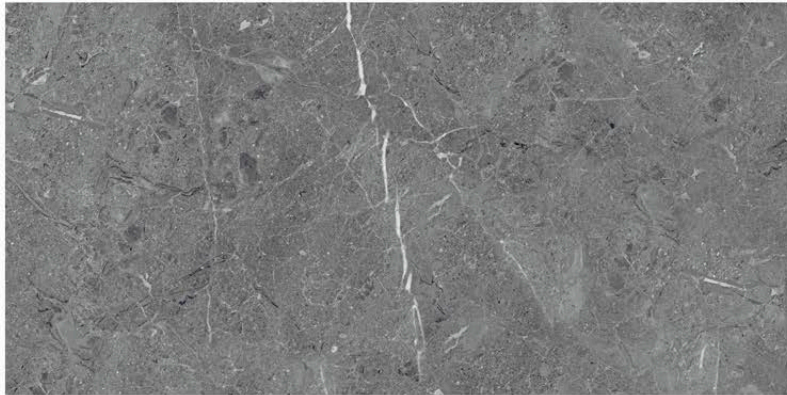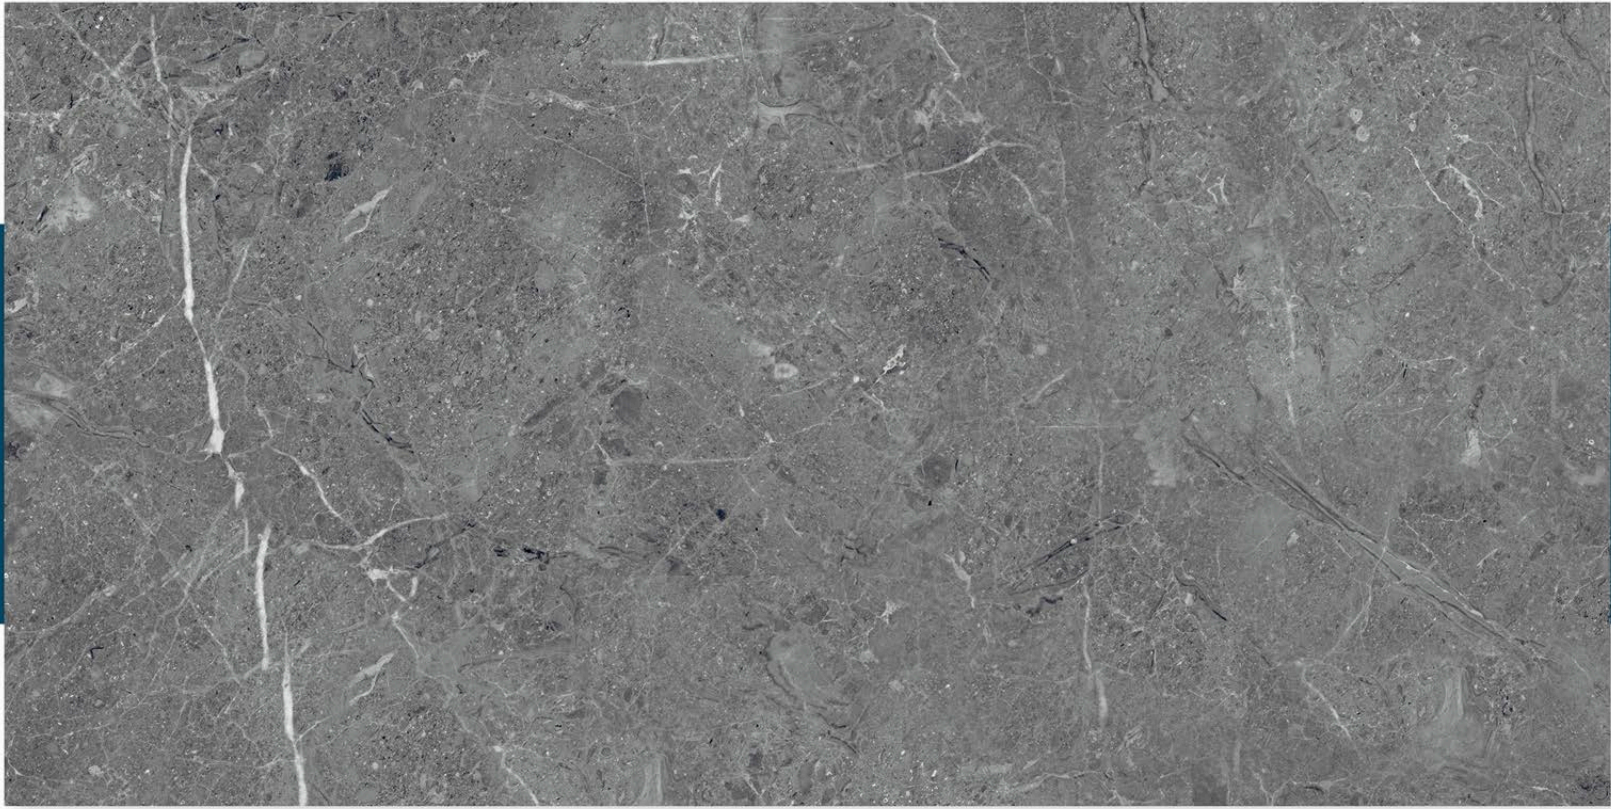

TACO CHARCOAL

600 X 1200 MM , SATIN ,



VOLT BEIGE

600 X 1200 MM , SATIN ,

TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/EN14411 GROUP BIA	MEAN VALUE OF PGVT	MEAN VALUE OF GVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.6 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg.	Min. 90	Min.10	GLOSSOMETER
SURFACE MECHANICAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101
THERMO HYDROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	> 0.40	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fireproof	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Doesn't yield Pb & Cd	Doesn't yield Pb & Cd	ISO-10545-15

PACKING DETAILS

Size	Thickness (approx*)	Pieces / Box	Area / Box (approx*)		Weight / Box (approx*)
600x1200mm	9 mm	2 pcs.	1.44 sq. mtr.	15.5 sq. ft.	30kgs.

AVAILABLE SIZE :

600x1200mm

800x1600mm

1200x1200mm

