








**Plain Surface** 

Thickness

**12** mm

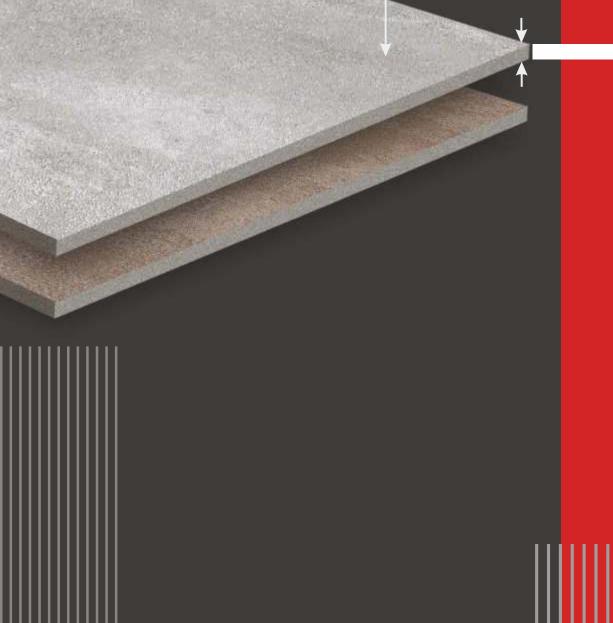







100% Water Proof



W Resistant




Fullbody





Plain Surface



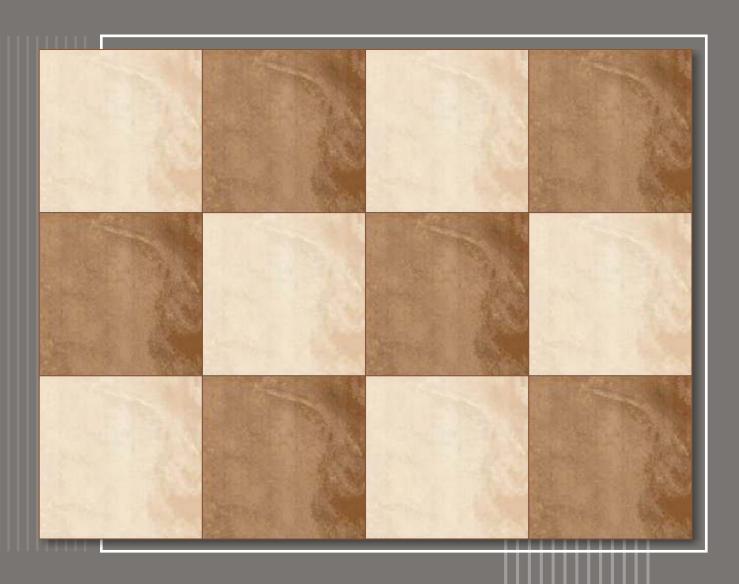







100% Water Proof



W Resistant



Fullbody





Plain Surface



















100% Water Proof

Fullbody

Plain Surface

Anti Slip

W Resistant

**12** mm Thickness





Anti Slip

100% Water Proof

W Resistant




Fullbody

**12** mm Thickness



Plain Surface



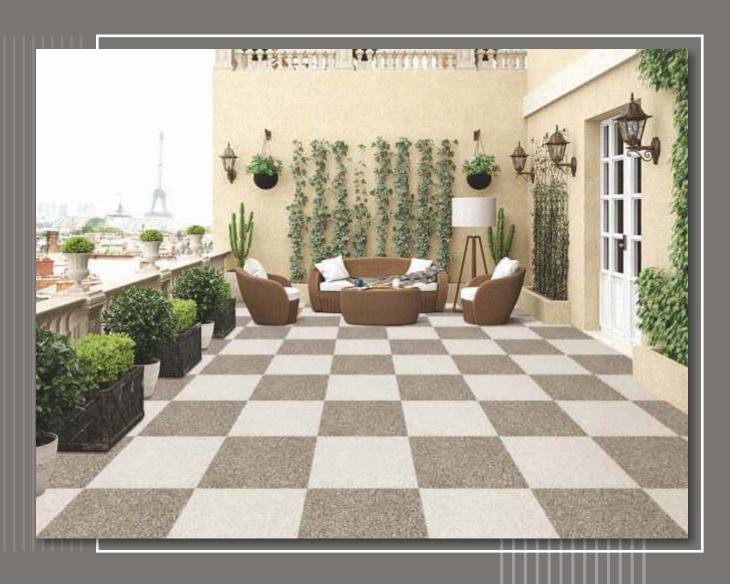












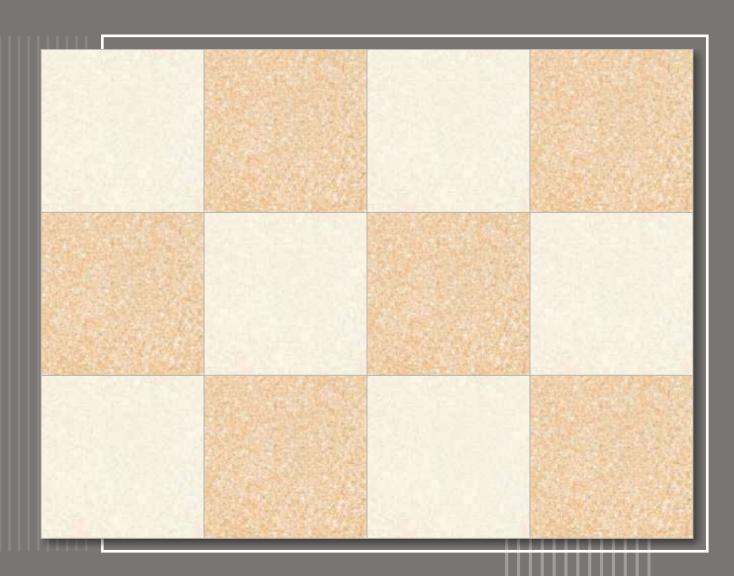







100% Water Proof



₩ UV Resistant



Fullbody





Plain Surface









100% Water Proof


Fullbody

Plain Surface

Anti Slip

W Resistant



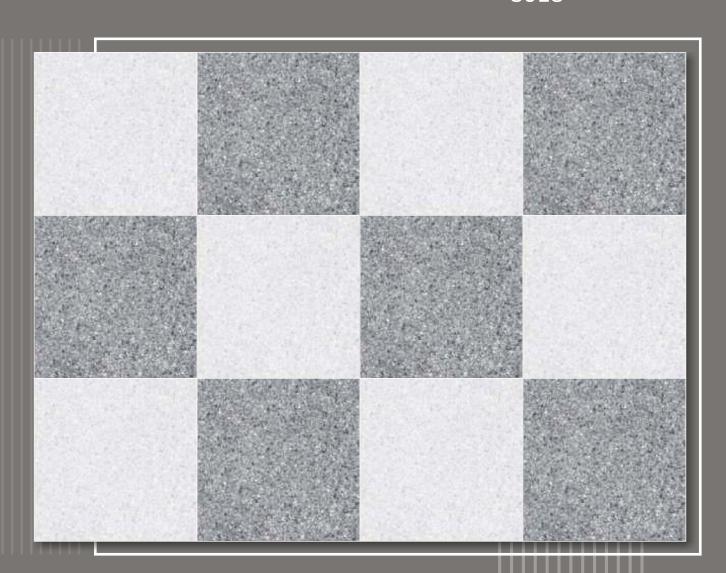







100% Water Proof



W Resistant



Fullbody





Plain Surface





































100% Water Proof



W Resistant



Fullbody





Plain Surface









Anti Slip

100% Water Proof

W Resistant



Fullbody

12 mm
Thickness

Plain Surface









Anti Slip

100% Water Proof

W Resistant



Fullbody

**12** mm Thickness



Plain Surface









Anti Slip

100% Water Proof

W Resistant



Fullbody




Plain Surface









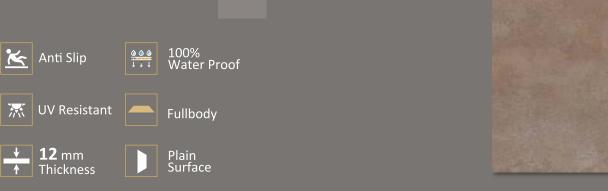







Anti Slip

100% Water Proof

W Resistant




Fullbody

**12** mm Thickness




Plain Surface




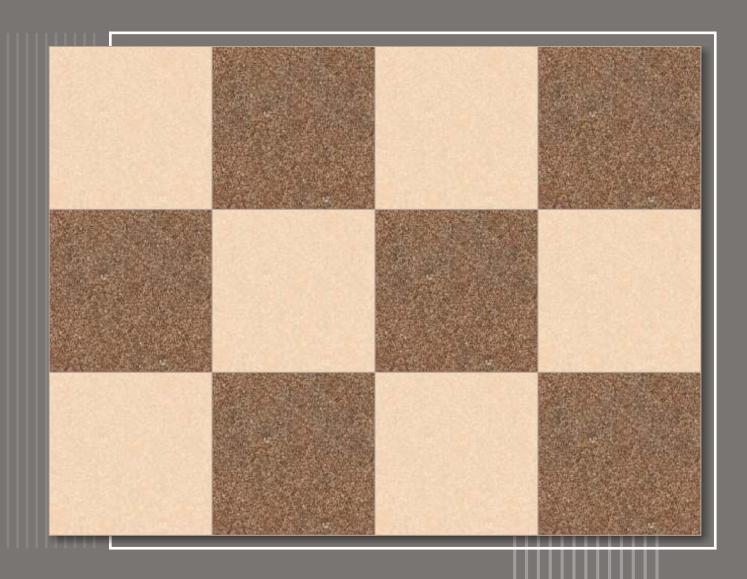








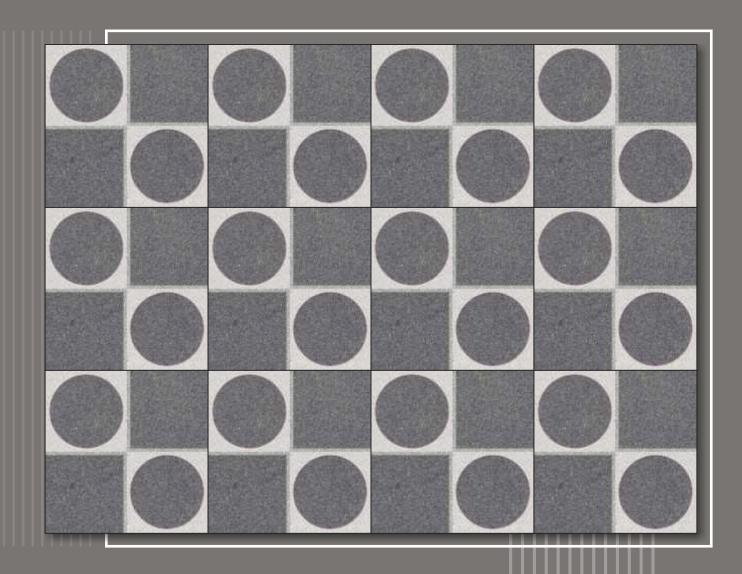














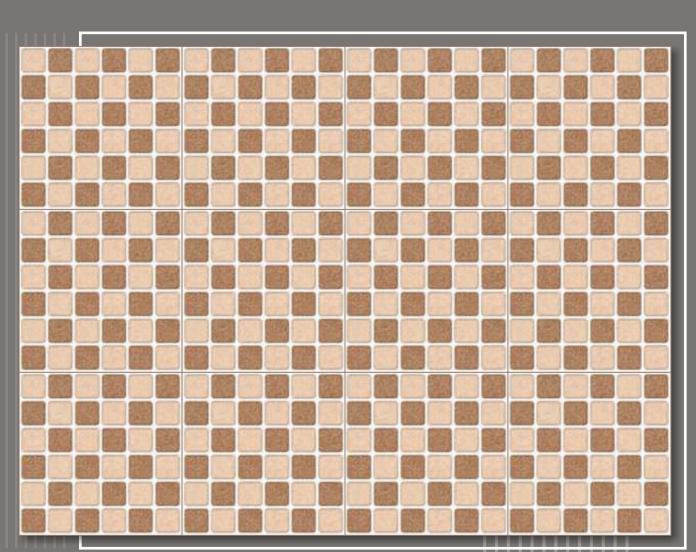

Anti Slip

₩ UV Resistant

12 mm
Thickness

100% Water Proof


Fullbody

Plain Surface








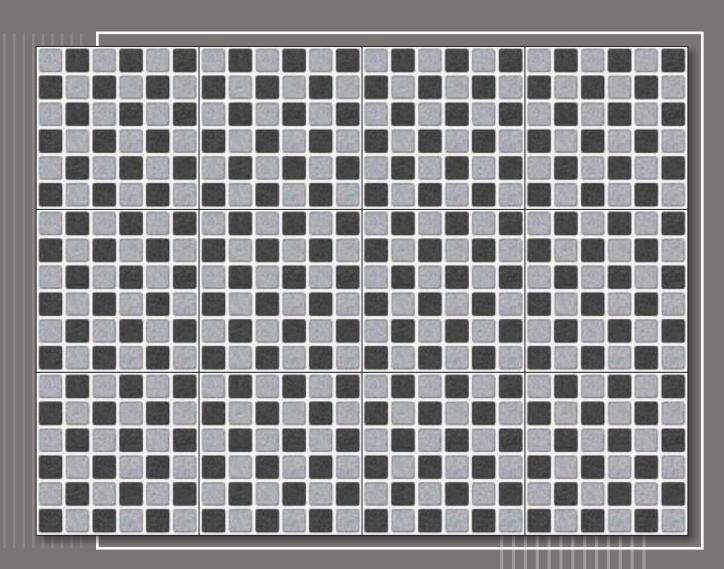









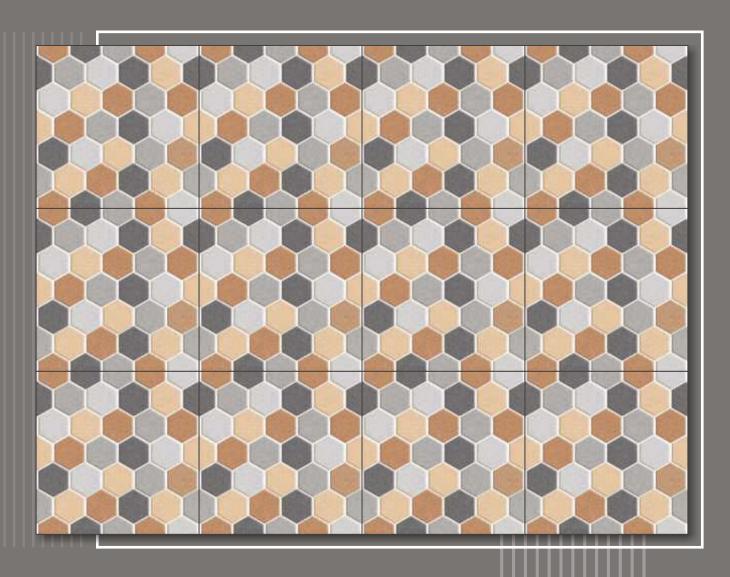







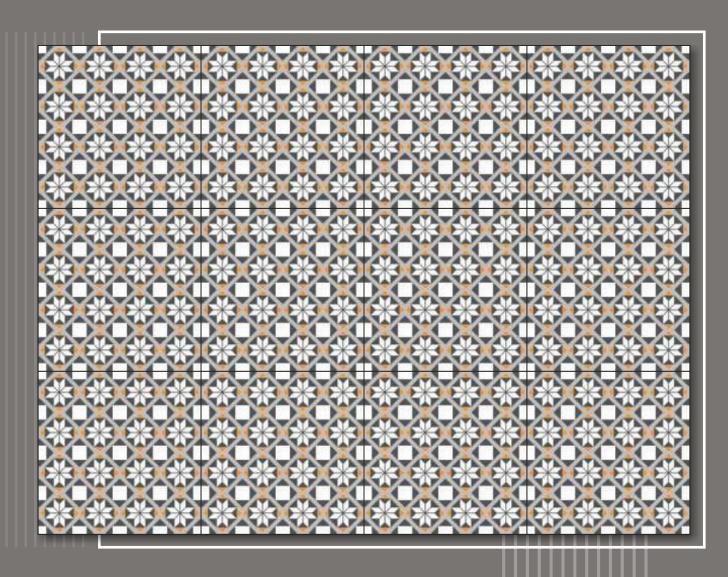


















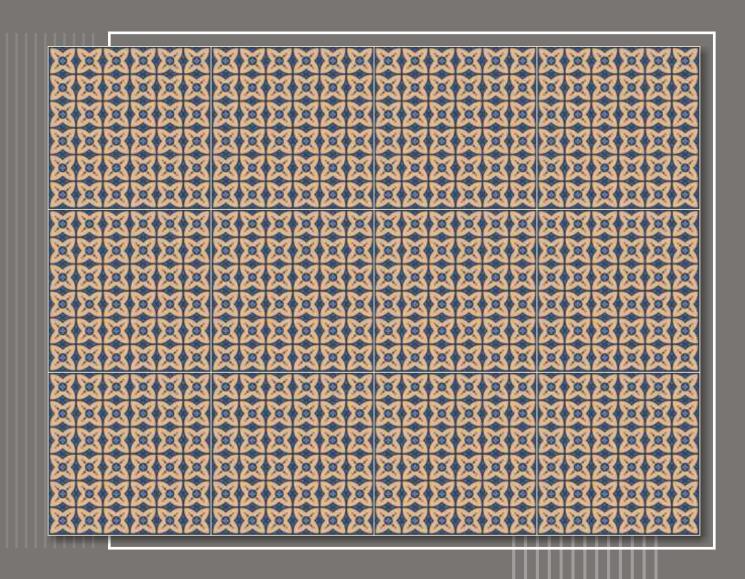









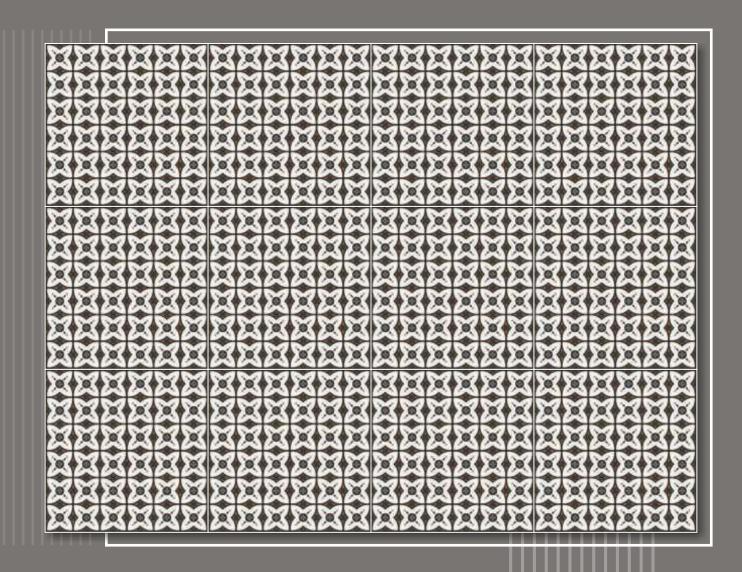








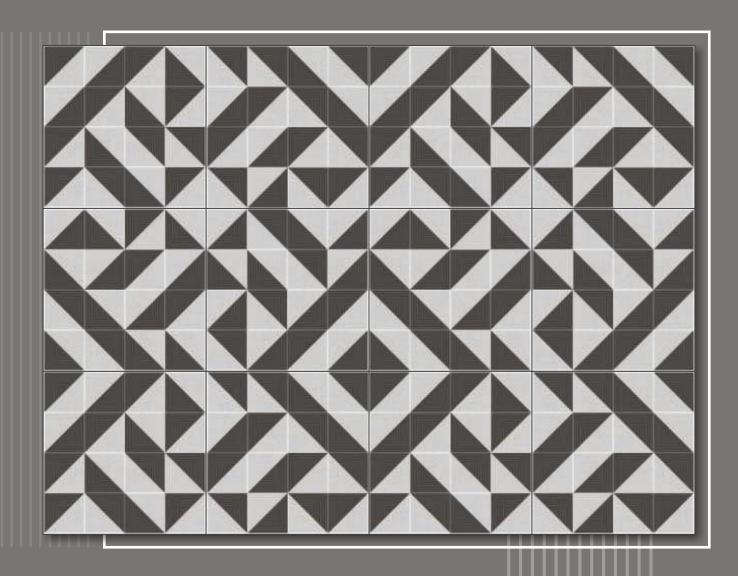







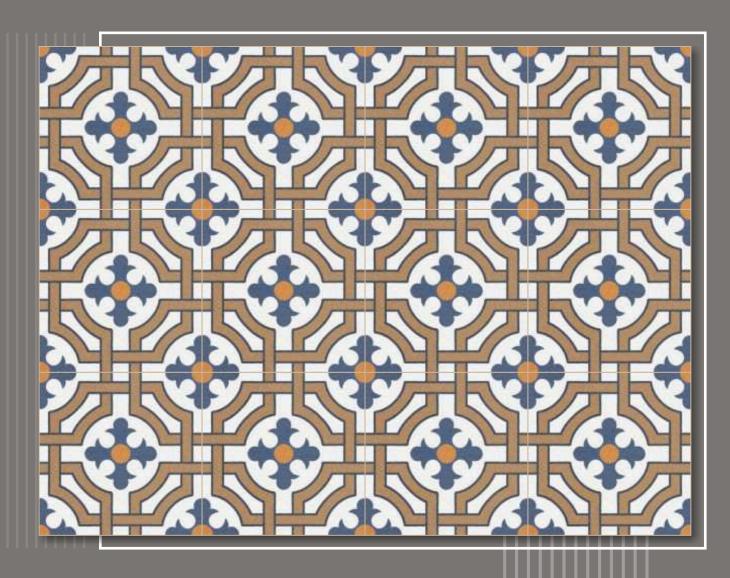







100% Water Proof



W Resistant



Fullbody






Plain Surface









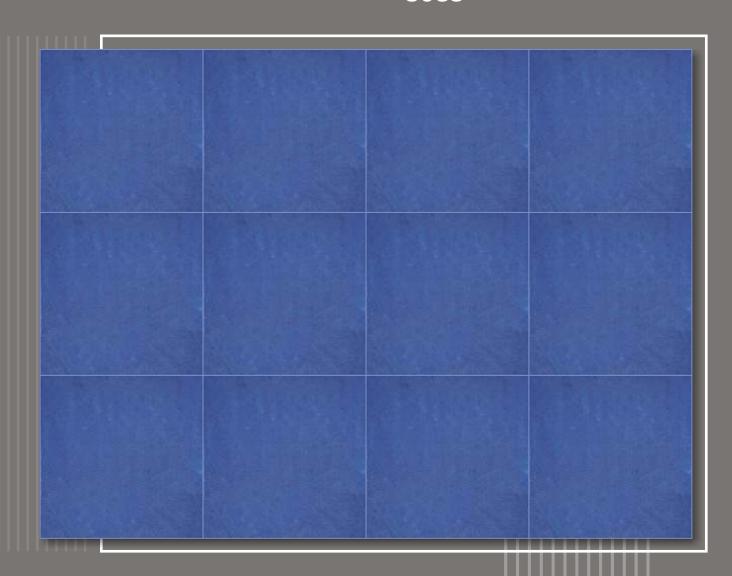

100% Water Proof

Fullbody

Plain Surface

Anti Slip


WV Resistant

**12** mm Thickness







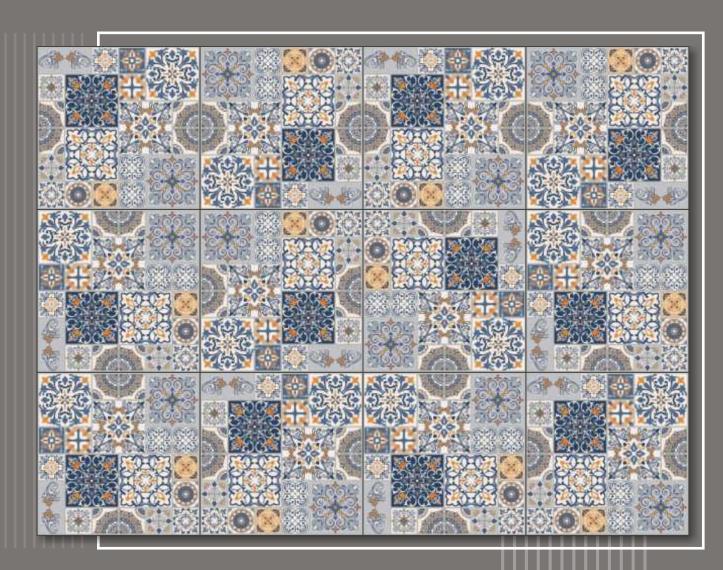

















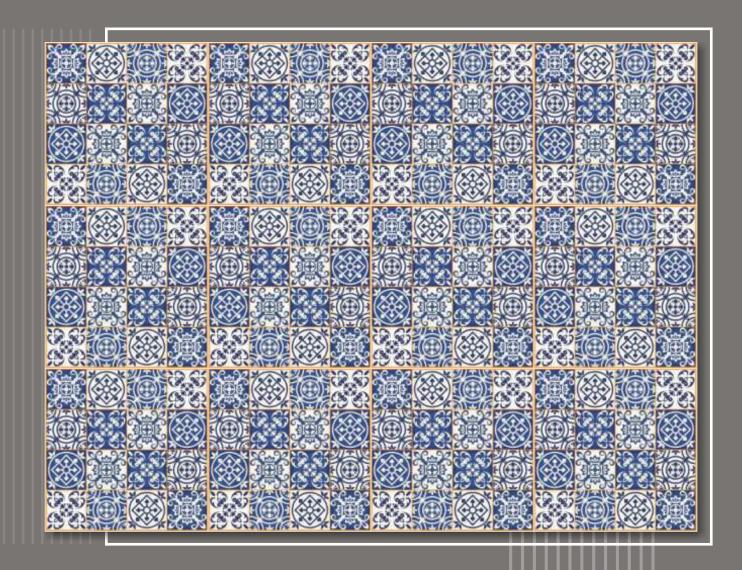








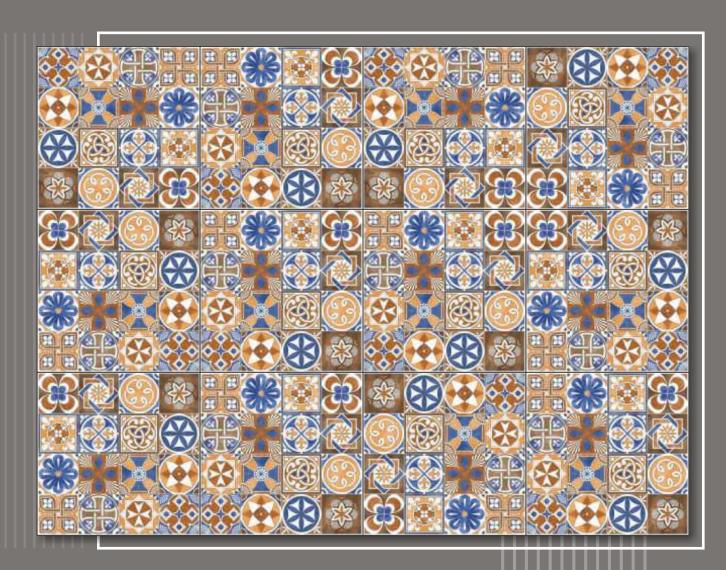








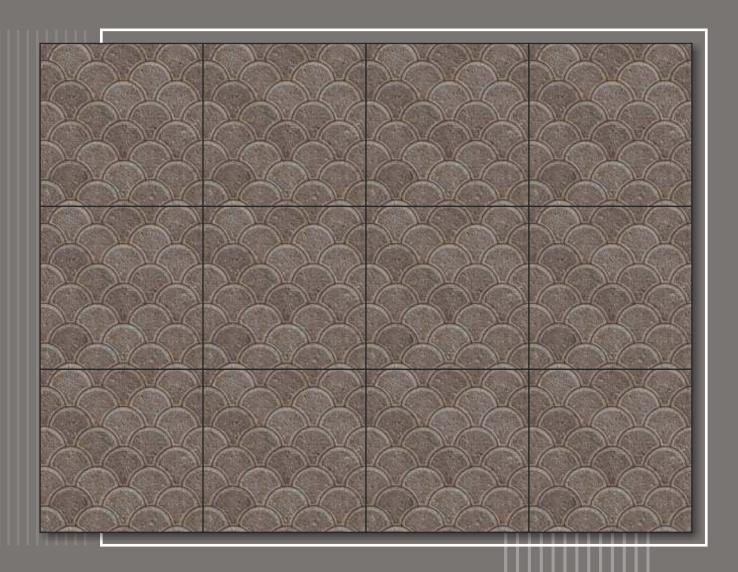









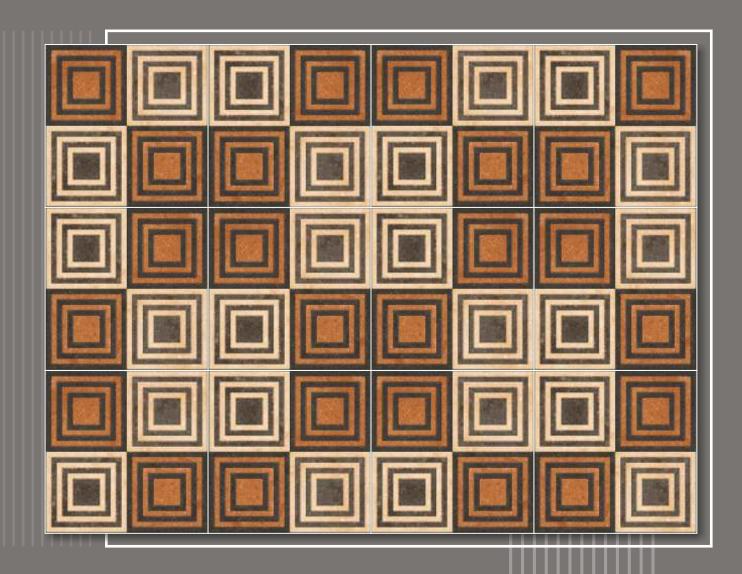








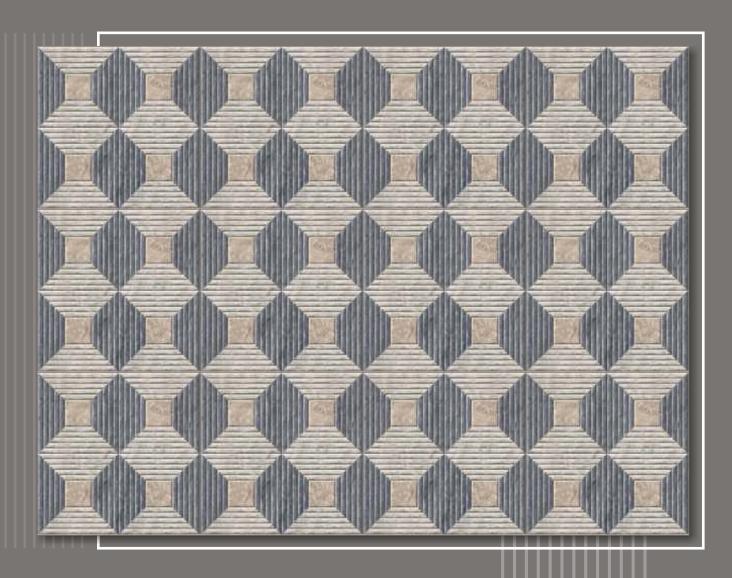







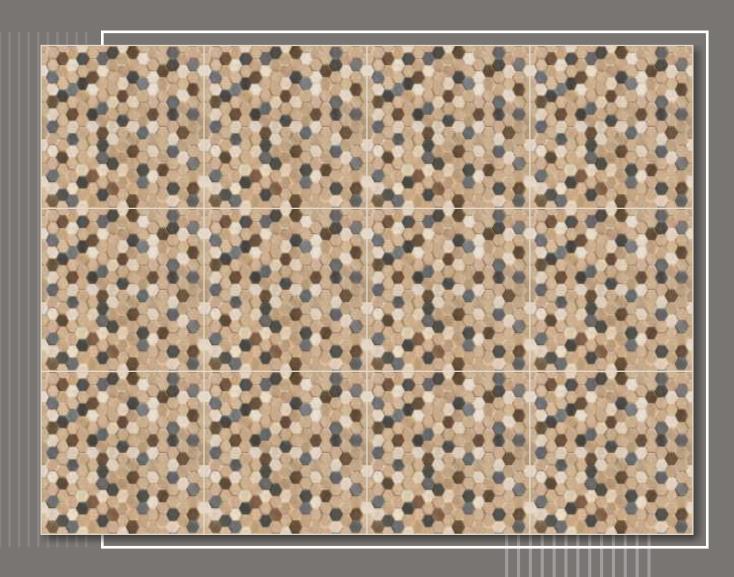
















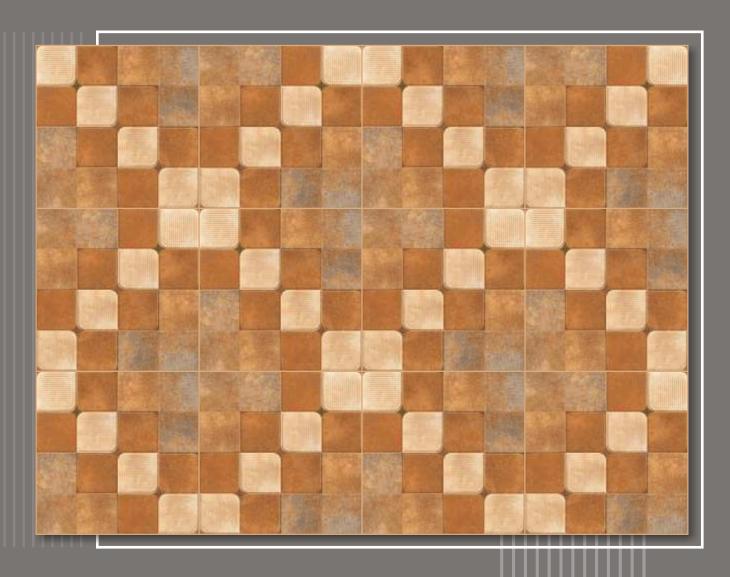

















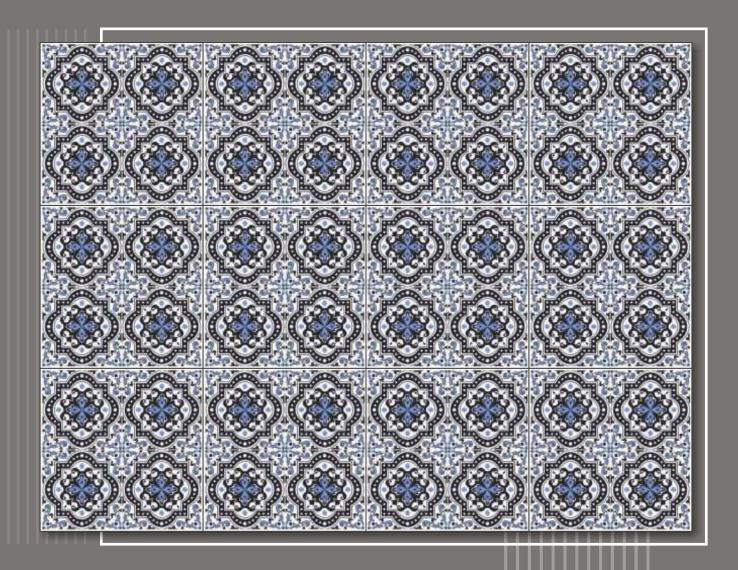







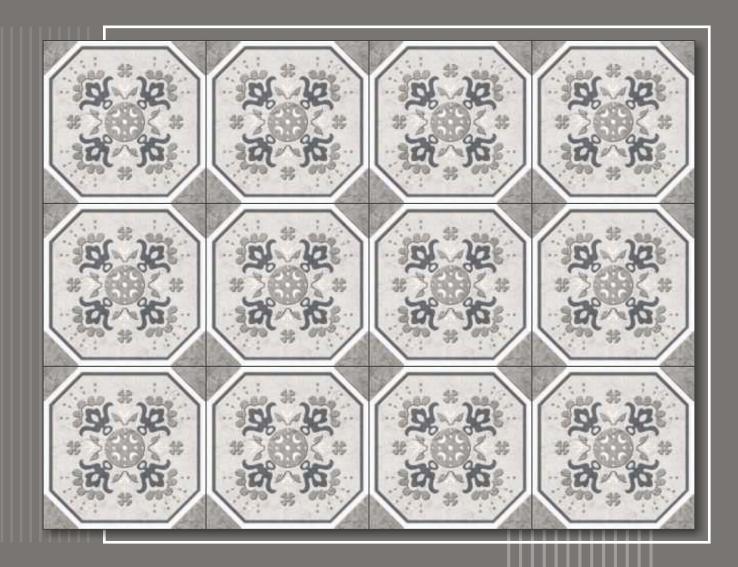







100% Water Proof



W Resistant




Fullbody





Plain Surface



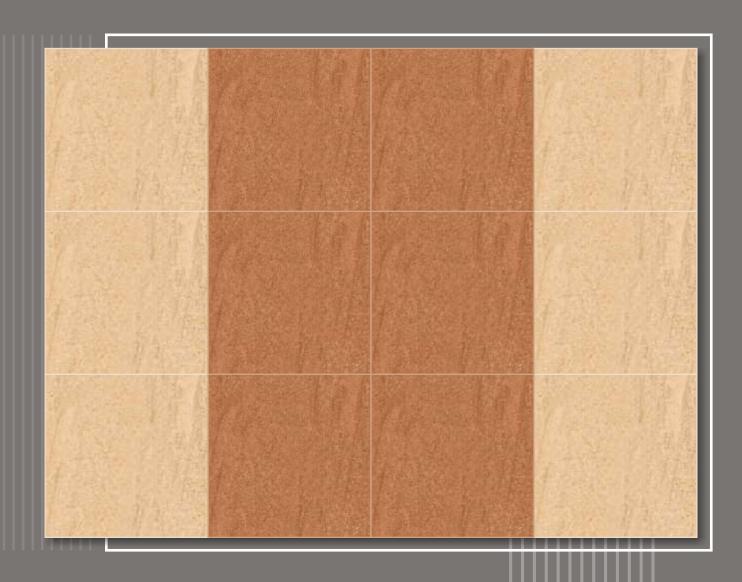





Anti Slip

100% Water Proof

W Resistant




Fullbody

**12** mm Thickness



Plain Surface



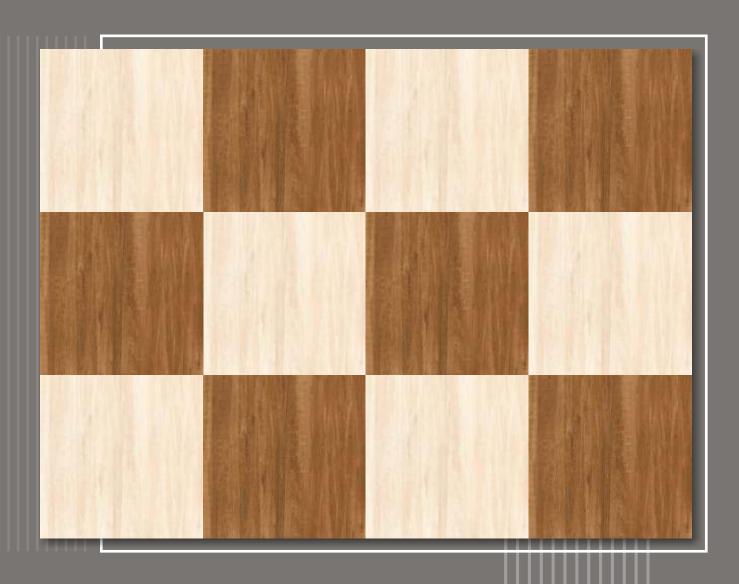









100% Water Proof

W Resistant




Fullbody

12 mm
Thickness



Plain Surface





100% Water Proof


Fullbody


Plain Surface

Anti Slip

W Resistant


**12** mm Thickness




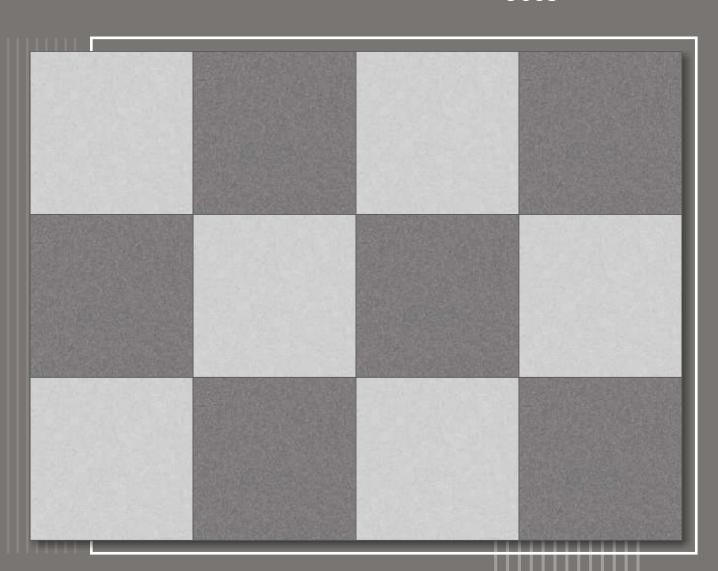







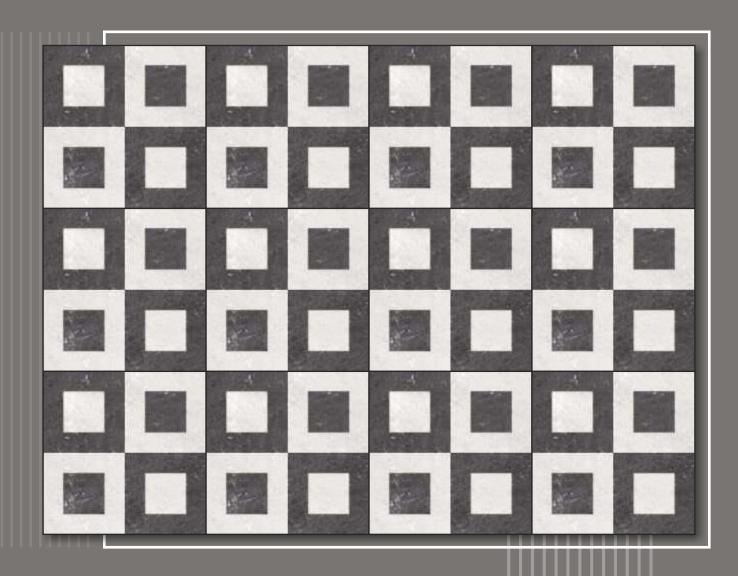



## **TECHNICAL SPECIFICATION OF PARKING TILES**

	CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	MEAN VALUE OF OUR TILES	TEST METHOD
Regulatory Properties	Deviation In Length & Width	±0.50%	±0.10%	ISO-10545-2
	Deviation In Thickness	±5.00%	±4.00%	ISO-10545-2
	Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
	Rectangularity	±0.50%	±0.10%	ISO-10545-2
	Surface Flatness	±0.50%	±0.20%	ISO-10545-2
	Color Differences	Unaltered	No Change	ISO-10545-16
Structural Properties	Water Absorption	<0.50%	<0.05%	ISO-10545-3
	Apparent Density	>2.00 g/cc	>2.10 g/cc	DIN 51082
Massive Mechanical Properties	Modulus of Rupture	Min 35N/mm²	Min 40N/mm²	ISO-10545-4
	Breaking Strength	Min 1300 N	Min 2000 N	ISO-10545-4
	Impact Resistance	As Per Mfg.	Min. 0.55	ISO-10545-5
Surface Mechanical Properties	Surface Abrasion Resistance	As Per Mfg.	Min. Class-3	ISO-10545-7
	Moh's Hardness	As Per Mfg.	MIn. 4	EN 101
Thermo Hygrometric Properties	Frost Resistance	No Damage	No Damage	ISO-10545-12
	Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
	Moisture Expansion	Nil	Nil	ISO-10545-10
	Thermal Expansion(COE)	Max 9.0 X 10- <sup>6</sup>	Max 6.5 X 10- <sup>6</sup>	ISO-10545-8
	Crazing Resistance	As Per Mfg.	Min. 10 Cycle	ISO-10545-11
Chemical Properties	Chemical Resistance	No Damage	No Damage	ISO-10545-13
	Stain Resistance	Resistant	Resistant	ISO-10545-14
Safety Properties	Slip Resistance	As Per Mfg.	>0.40	ISO-10545-17
	Fire Resistance	As Per Mfg.	Fireproof	N. A.
	Lead & Cadmium given off by glazed tiles	As Per Mfg.	Does not yield Pb & Cd	ISO-10545-15

## **PACKING DEATIL**

Size	Thikness	Pcs. / Box	Coverage Area / Box (approx.)	Weight / Box (approx.)
400x400 mm	12mm	5	0.80 sq. mtr.	20.50 kg.

